




SINUS


Linear lighting system
curve

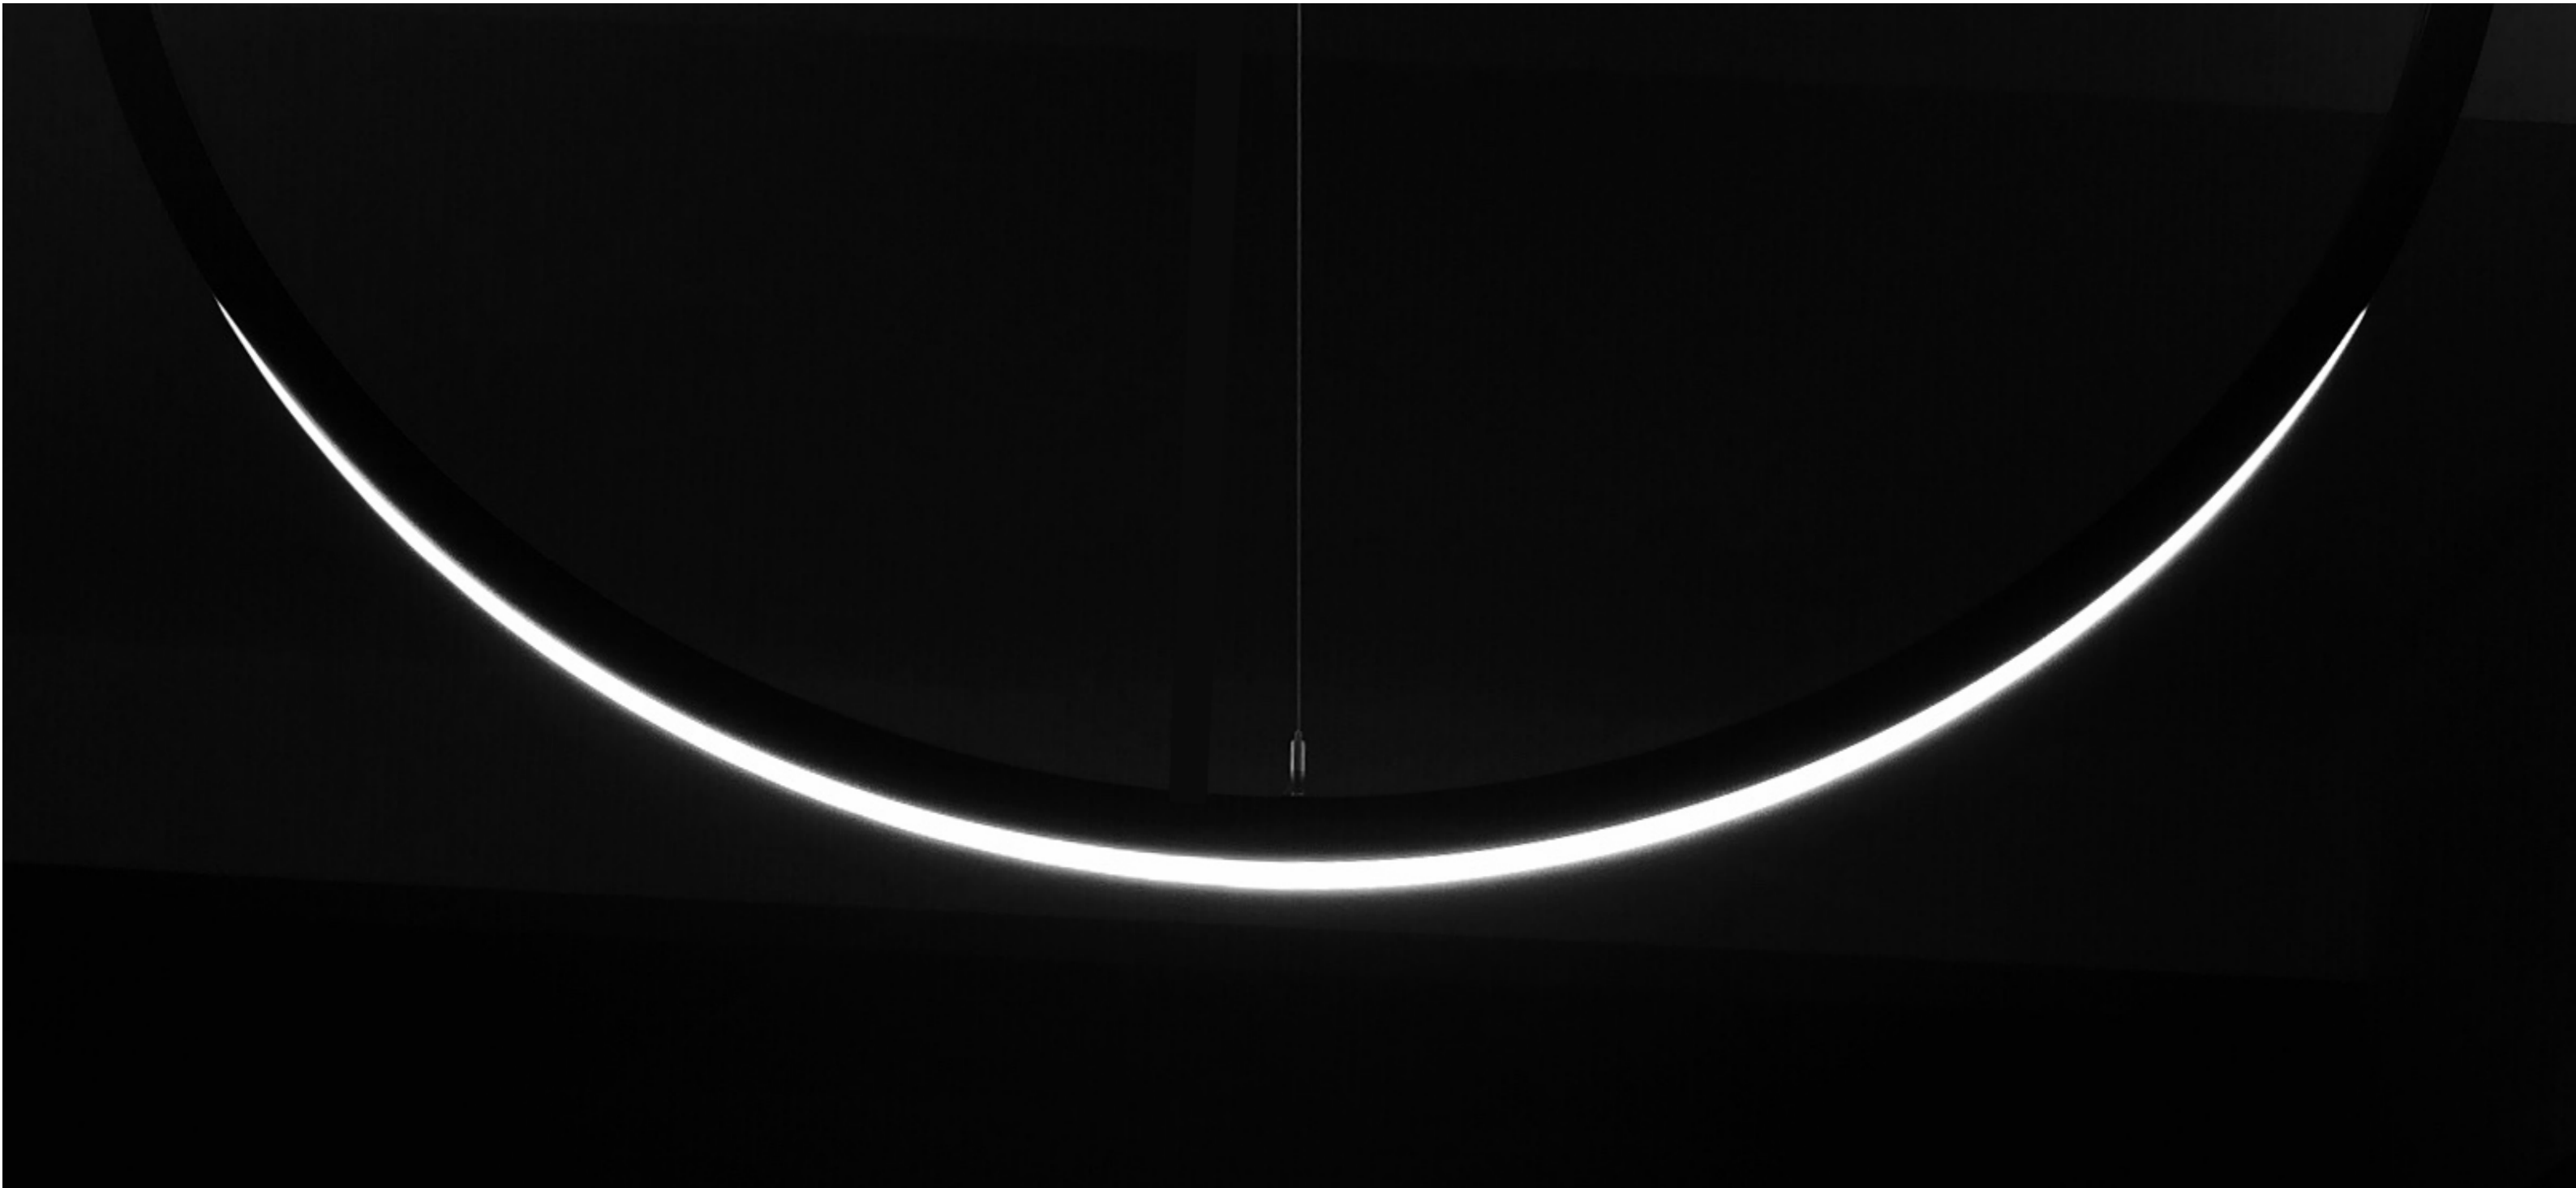

The Sinus Curve Lighting System offers an innovative approach to lighting design by transcending the conventional straight-line lighting into a dynamic interplay of curves and three-dimensional shapes. This system merges the simplicity of linear lighting with the elegance of fluid, curvilinear forms, allowing for both 2D and 3D configurations. The result is a flexible lighting solution that can adapt to various spaces and creative visions.

Basic Modules


SIN3535
Series

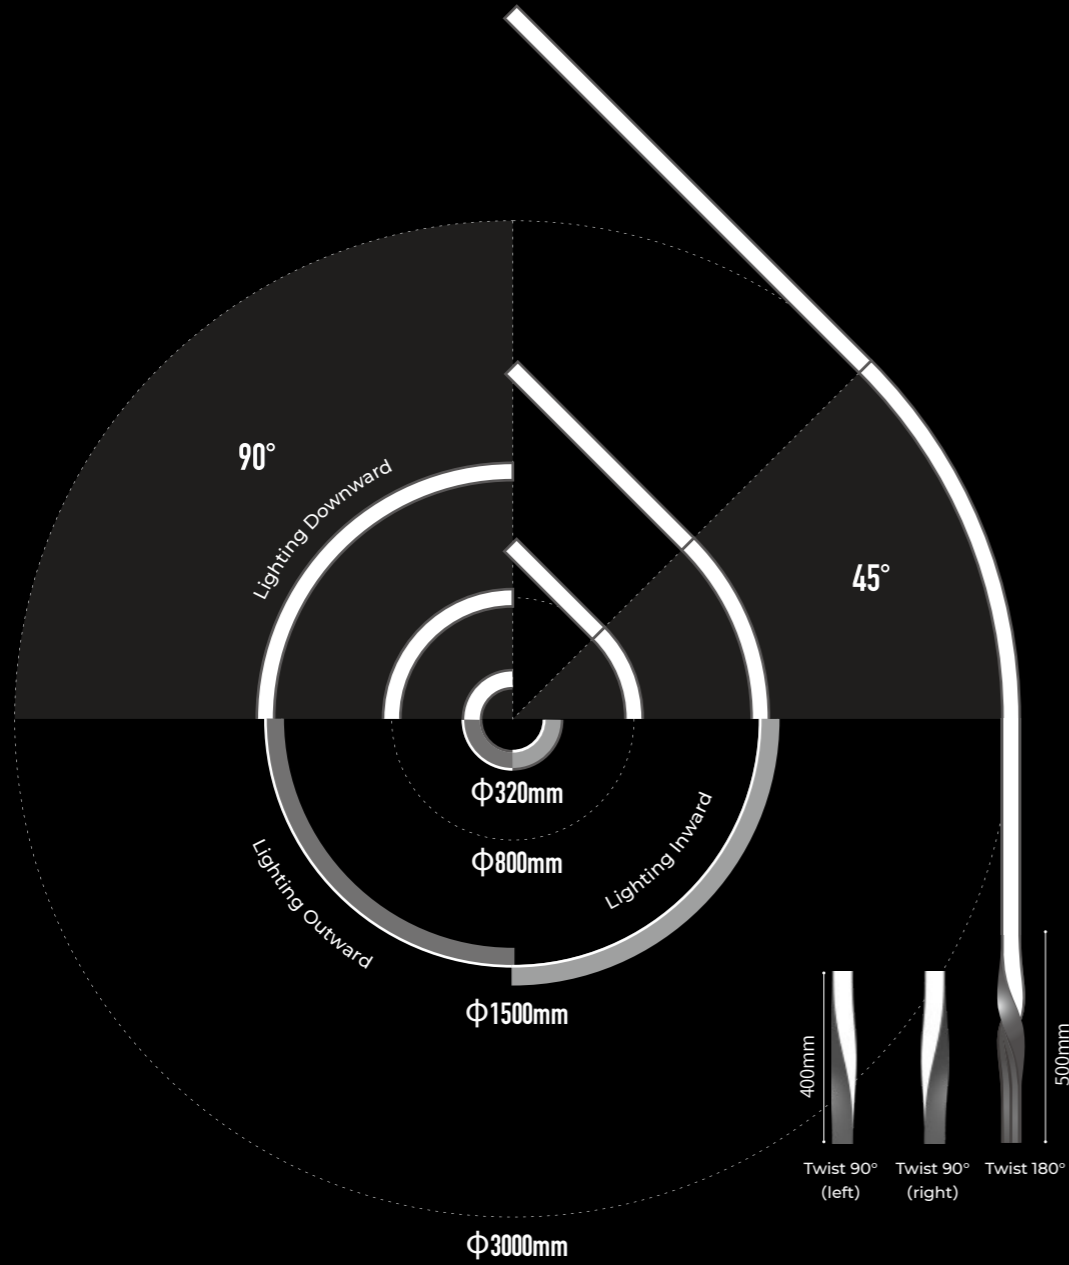

- Φ800mm, Curve 90° (Lighting Downward), 45° Rigid Modular
- Φ800mm, Curve 45° (Lighting Downward), 45° Rigid Modular
- Φ1500mm, Curve 90° (Lighting Downward), 45° Rigid Modular
- Φ1500mm, Curve 45° (Lighting Downward), 45° Rigid Modular
- Φ1500mm, Curve 90° (Lighting Inward), Flexible Strip
- Φ1500mm, Curve 90° (Lighting Outward), Flexible Strip
- Φ3000mm, Curve 45° (Lighting Downward), 22.5° Rigid Modular
- Straight Line (2500mm), Rigid Module (499mm)
- Φ320mm, Curve 90° (Lighting Downward), 90° Rigid Modular
- Φ320mm, Curve 90° (Lighting Outward), Flexible Strip
- Φ320mm, Curve 90° (Lighting Inward), Flexible Strip
- 400mm, Twist 90° (left), Flexible Strip
- 400mm, Twist 90° (right), Flexible Strip
- 500mm Twist 180°, Flexible Strip

Basic Modules

SIN5060
Series

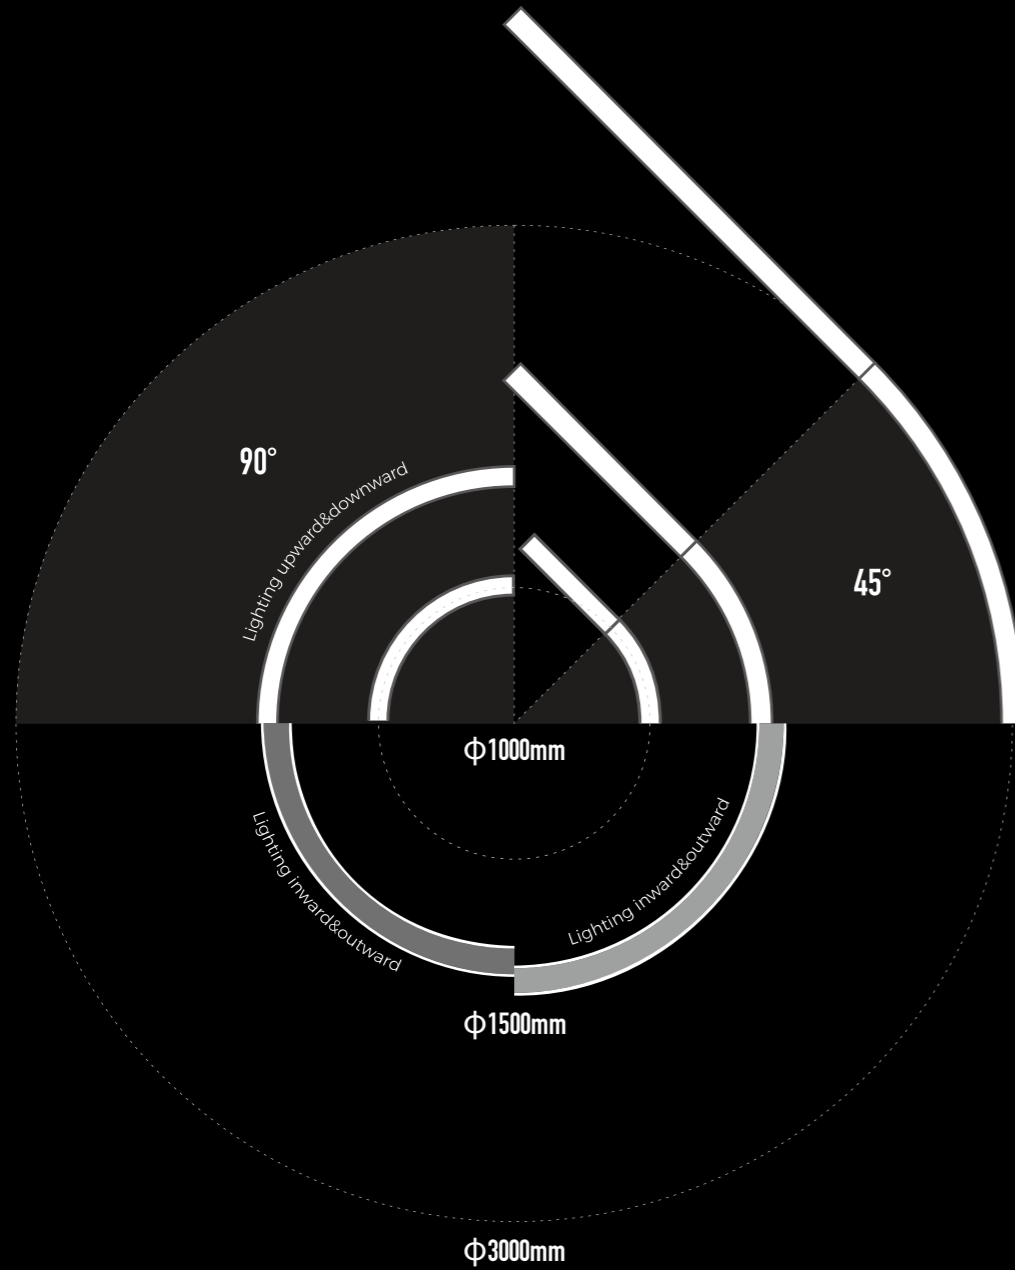

φ1000mm, Curve 90° (Lighting upward&downward),
45° Rigid Module



φ1000mm, Curve 45° (Lighting upward&downward),
45° Rigid Module



φ1500mm, Curve 90° (Lighting upward&downward),
45° Rigid Module



φ1500mm, Curve 45° (Lighting upward&downward),
45° Rigid Module



φ1500mm, Curve 90° (Lighting inward&outward),
Flexible Strip



φ1500mm, Curve 90° (Lighting inward&outward),
Flexible Strip




φ3000mm, Curve 45° (Lighting upward&downward),
22.5° Rigid Module




Straight Line (2500mm),
Rigid Module (499mm)



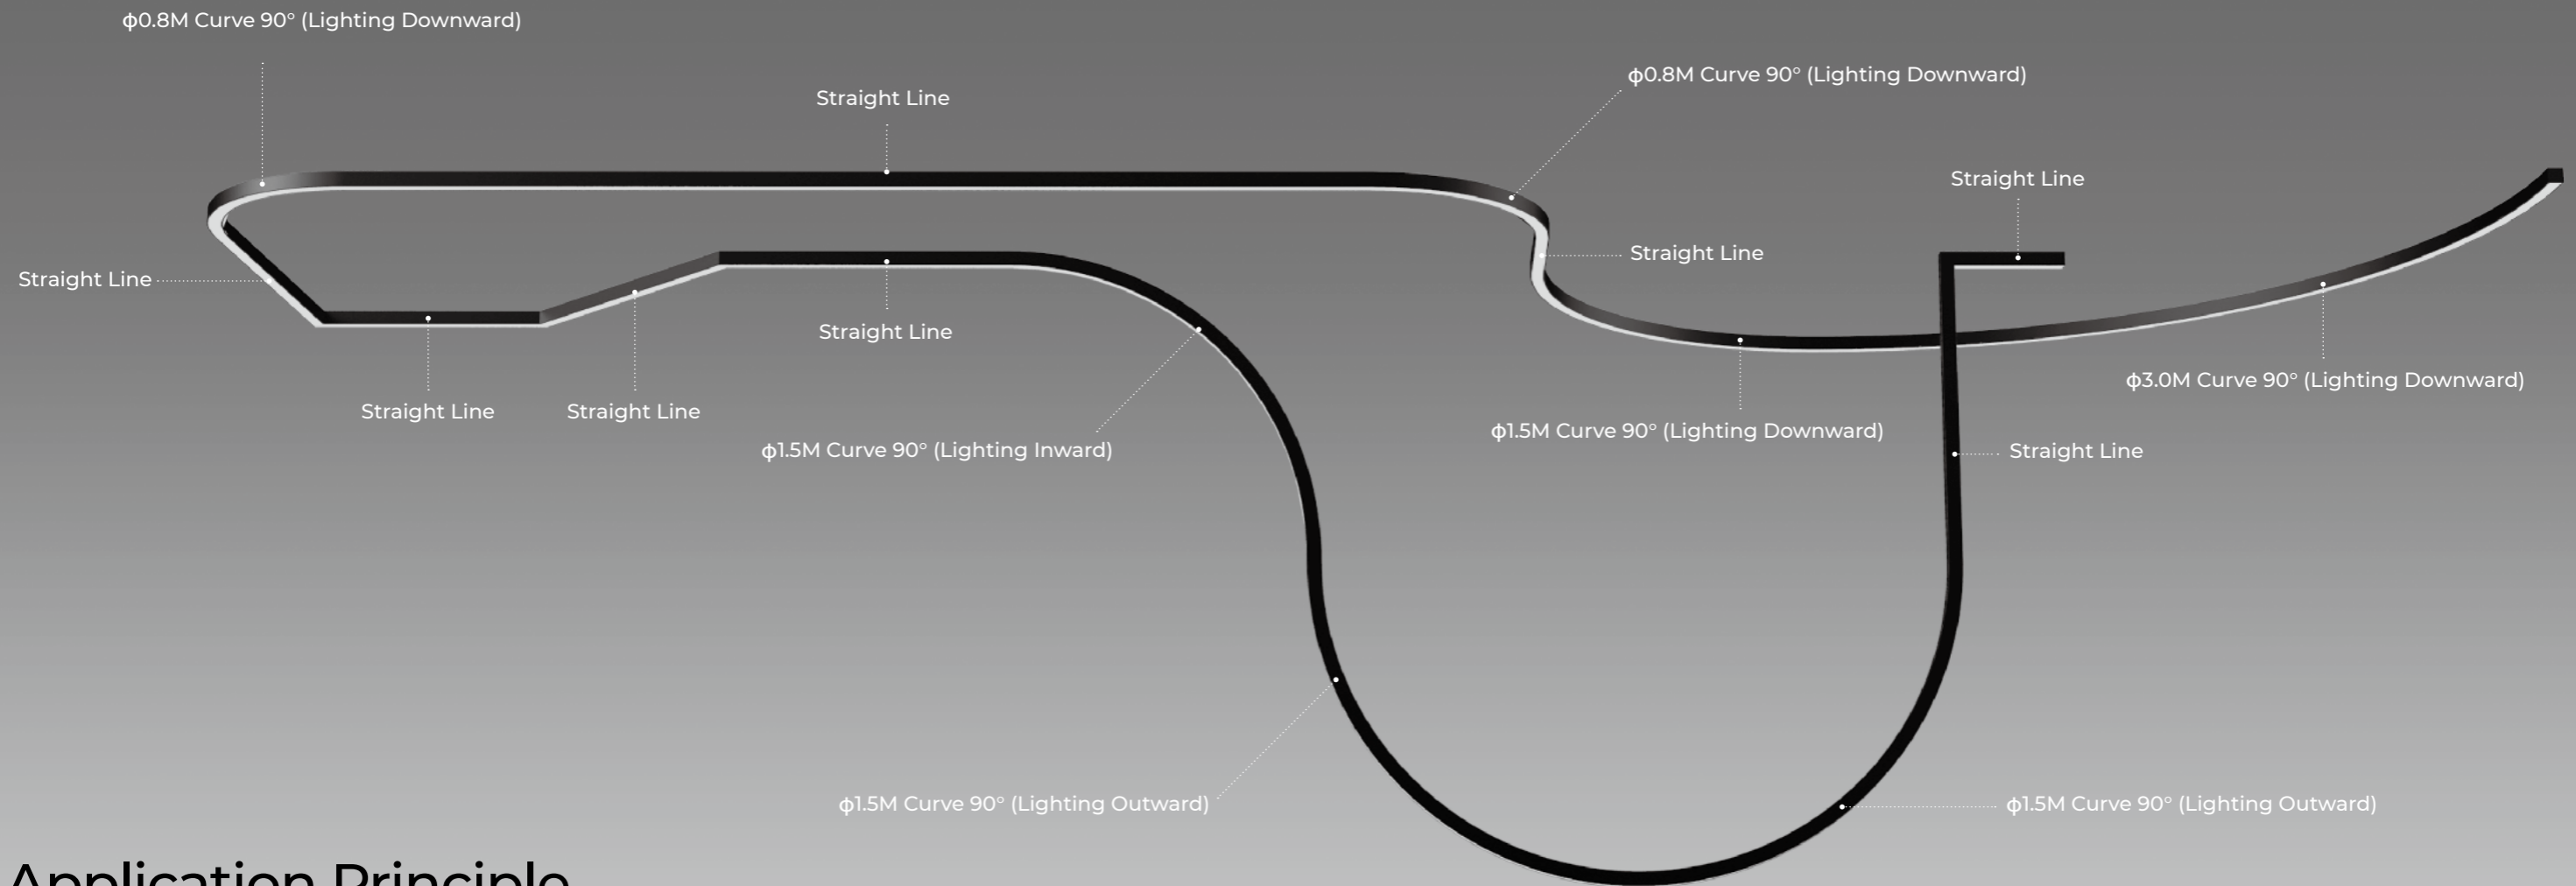

Application Principle

Straight modules can be cut in different lengths and angles freely for application. Curve modules and straight modules can be interconnected with accessories for random interconnection and application. Through the modules of lighting inward/lighting outward, the 3D spacial application could be realized. Limitless possibilities lead to limitless applications and thousands of styles.

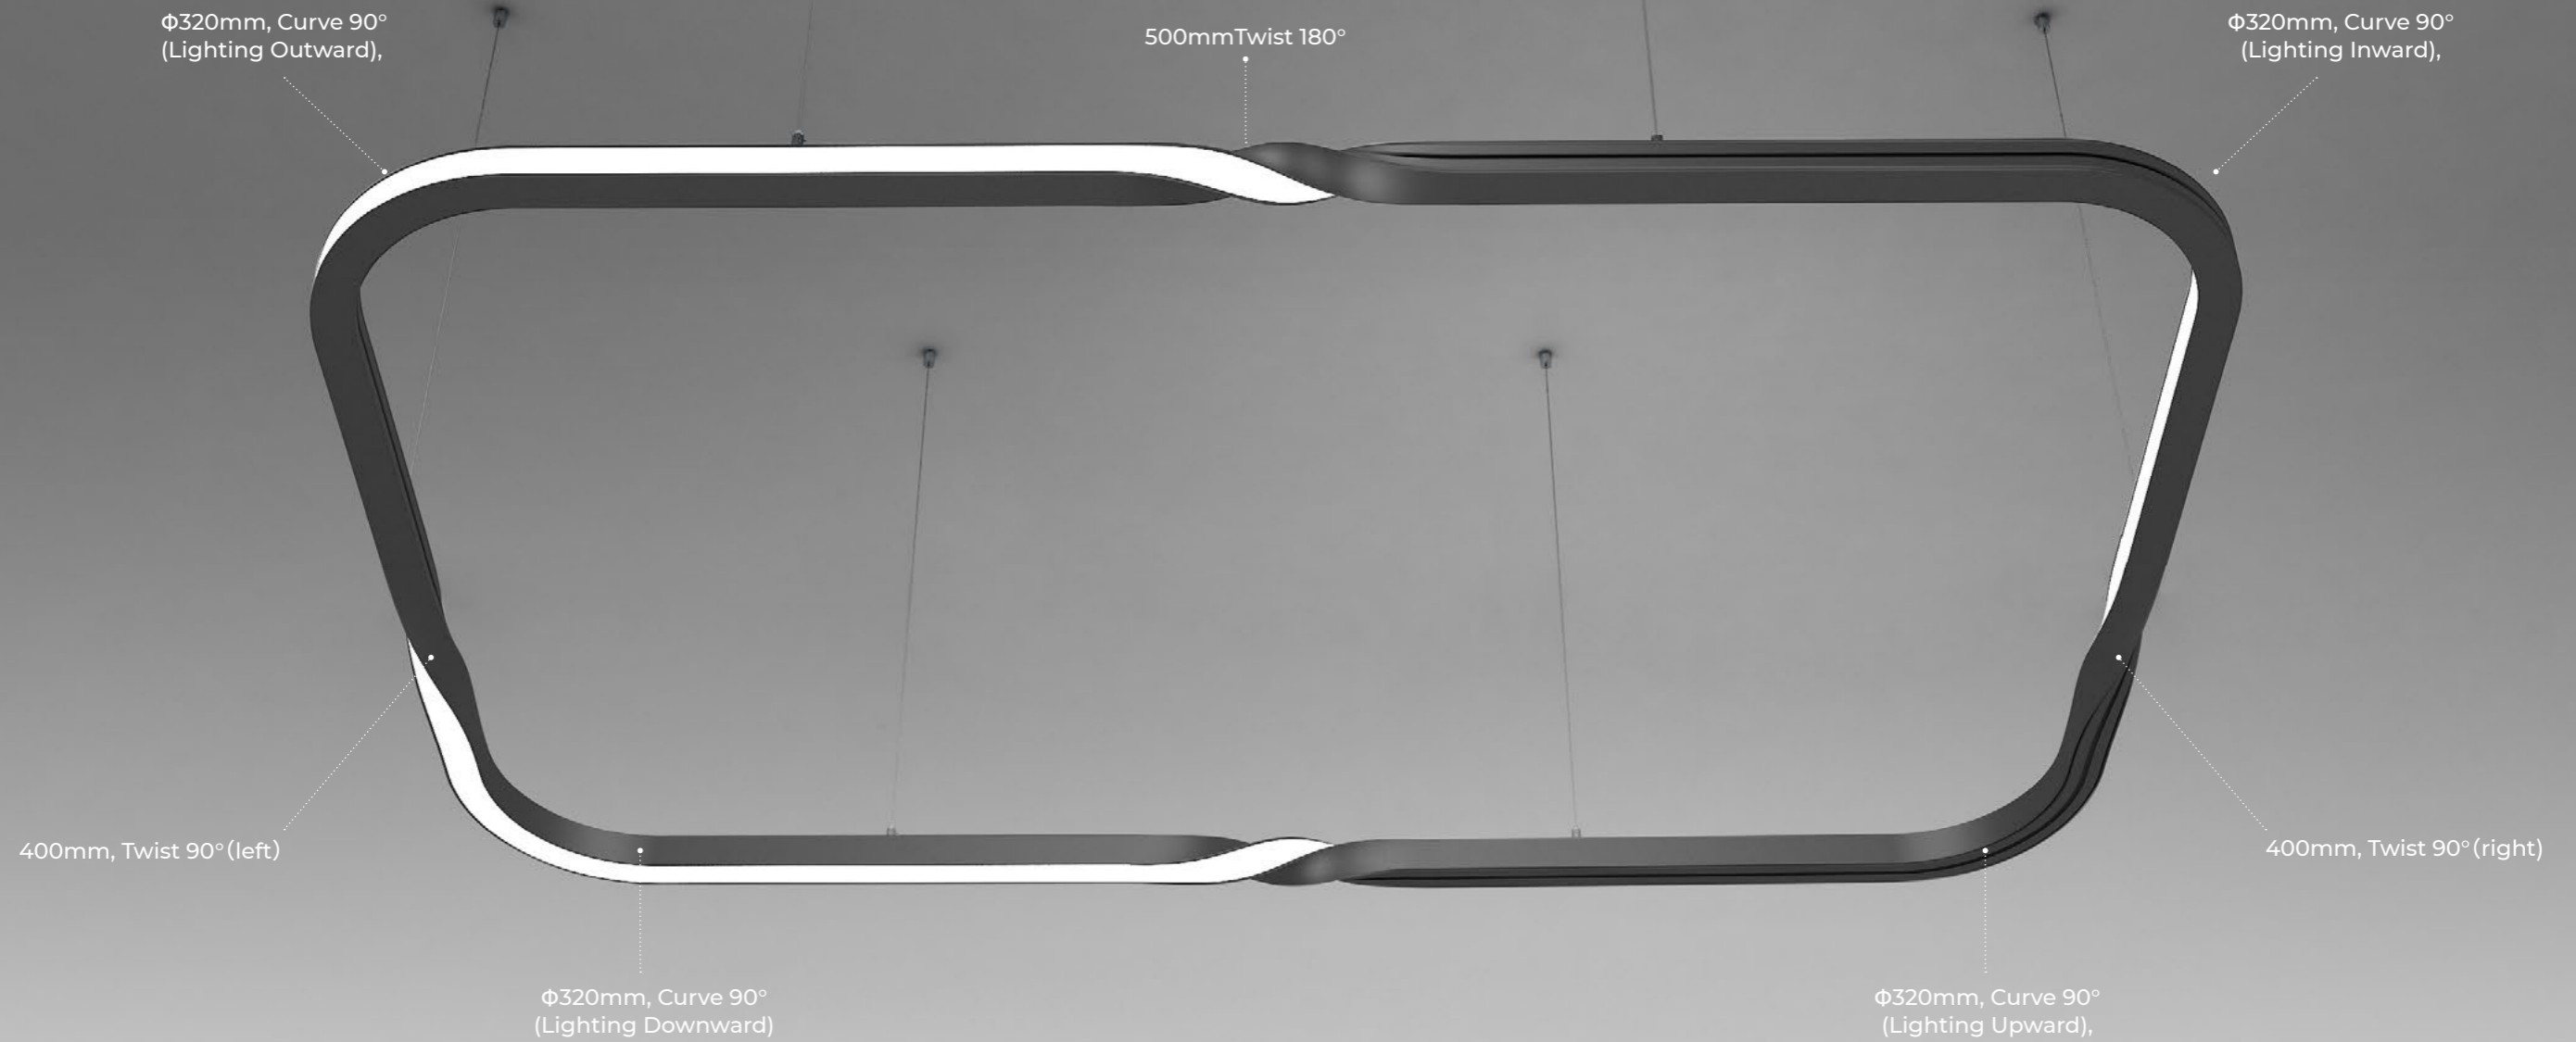

Application Principle NEW


φ320mm small curve modules get rid of the constraints of space, and can bend freely in a narrow space; the twist modules make the lighting surface flipping arbitrarily in the space. The new modules raise the freedom of curve system to a new height.

NEW Flexible Diffuser



20M/roll flexible diffuser
available for all modules
no light leakage


professional optical design
homogenous & soft lighting



dust-proof layers in both sides
easy cleaning with water

50% higher in lighting efficiency

* Compared with our 1st generation curve system

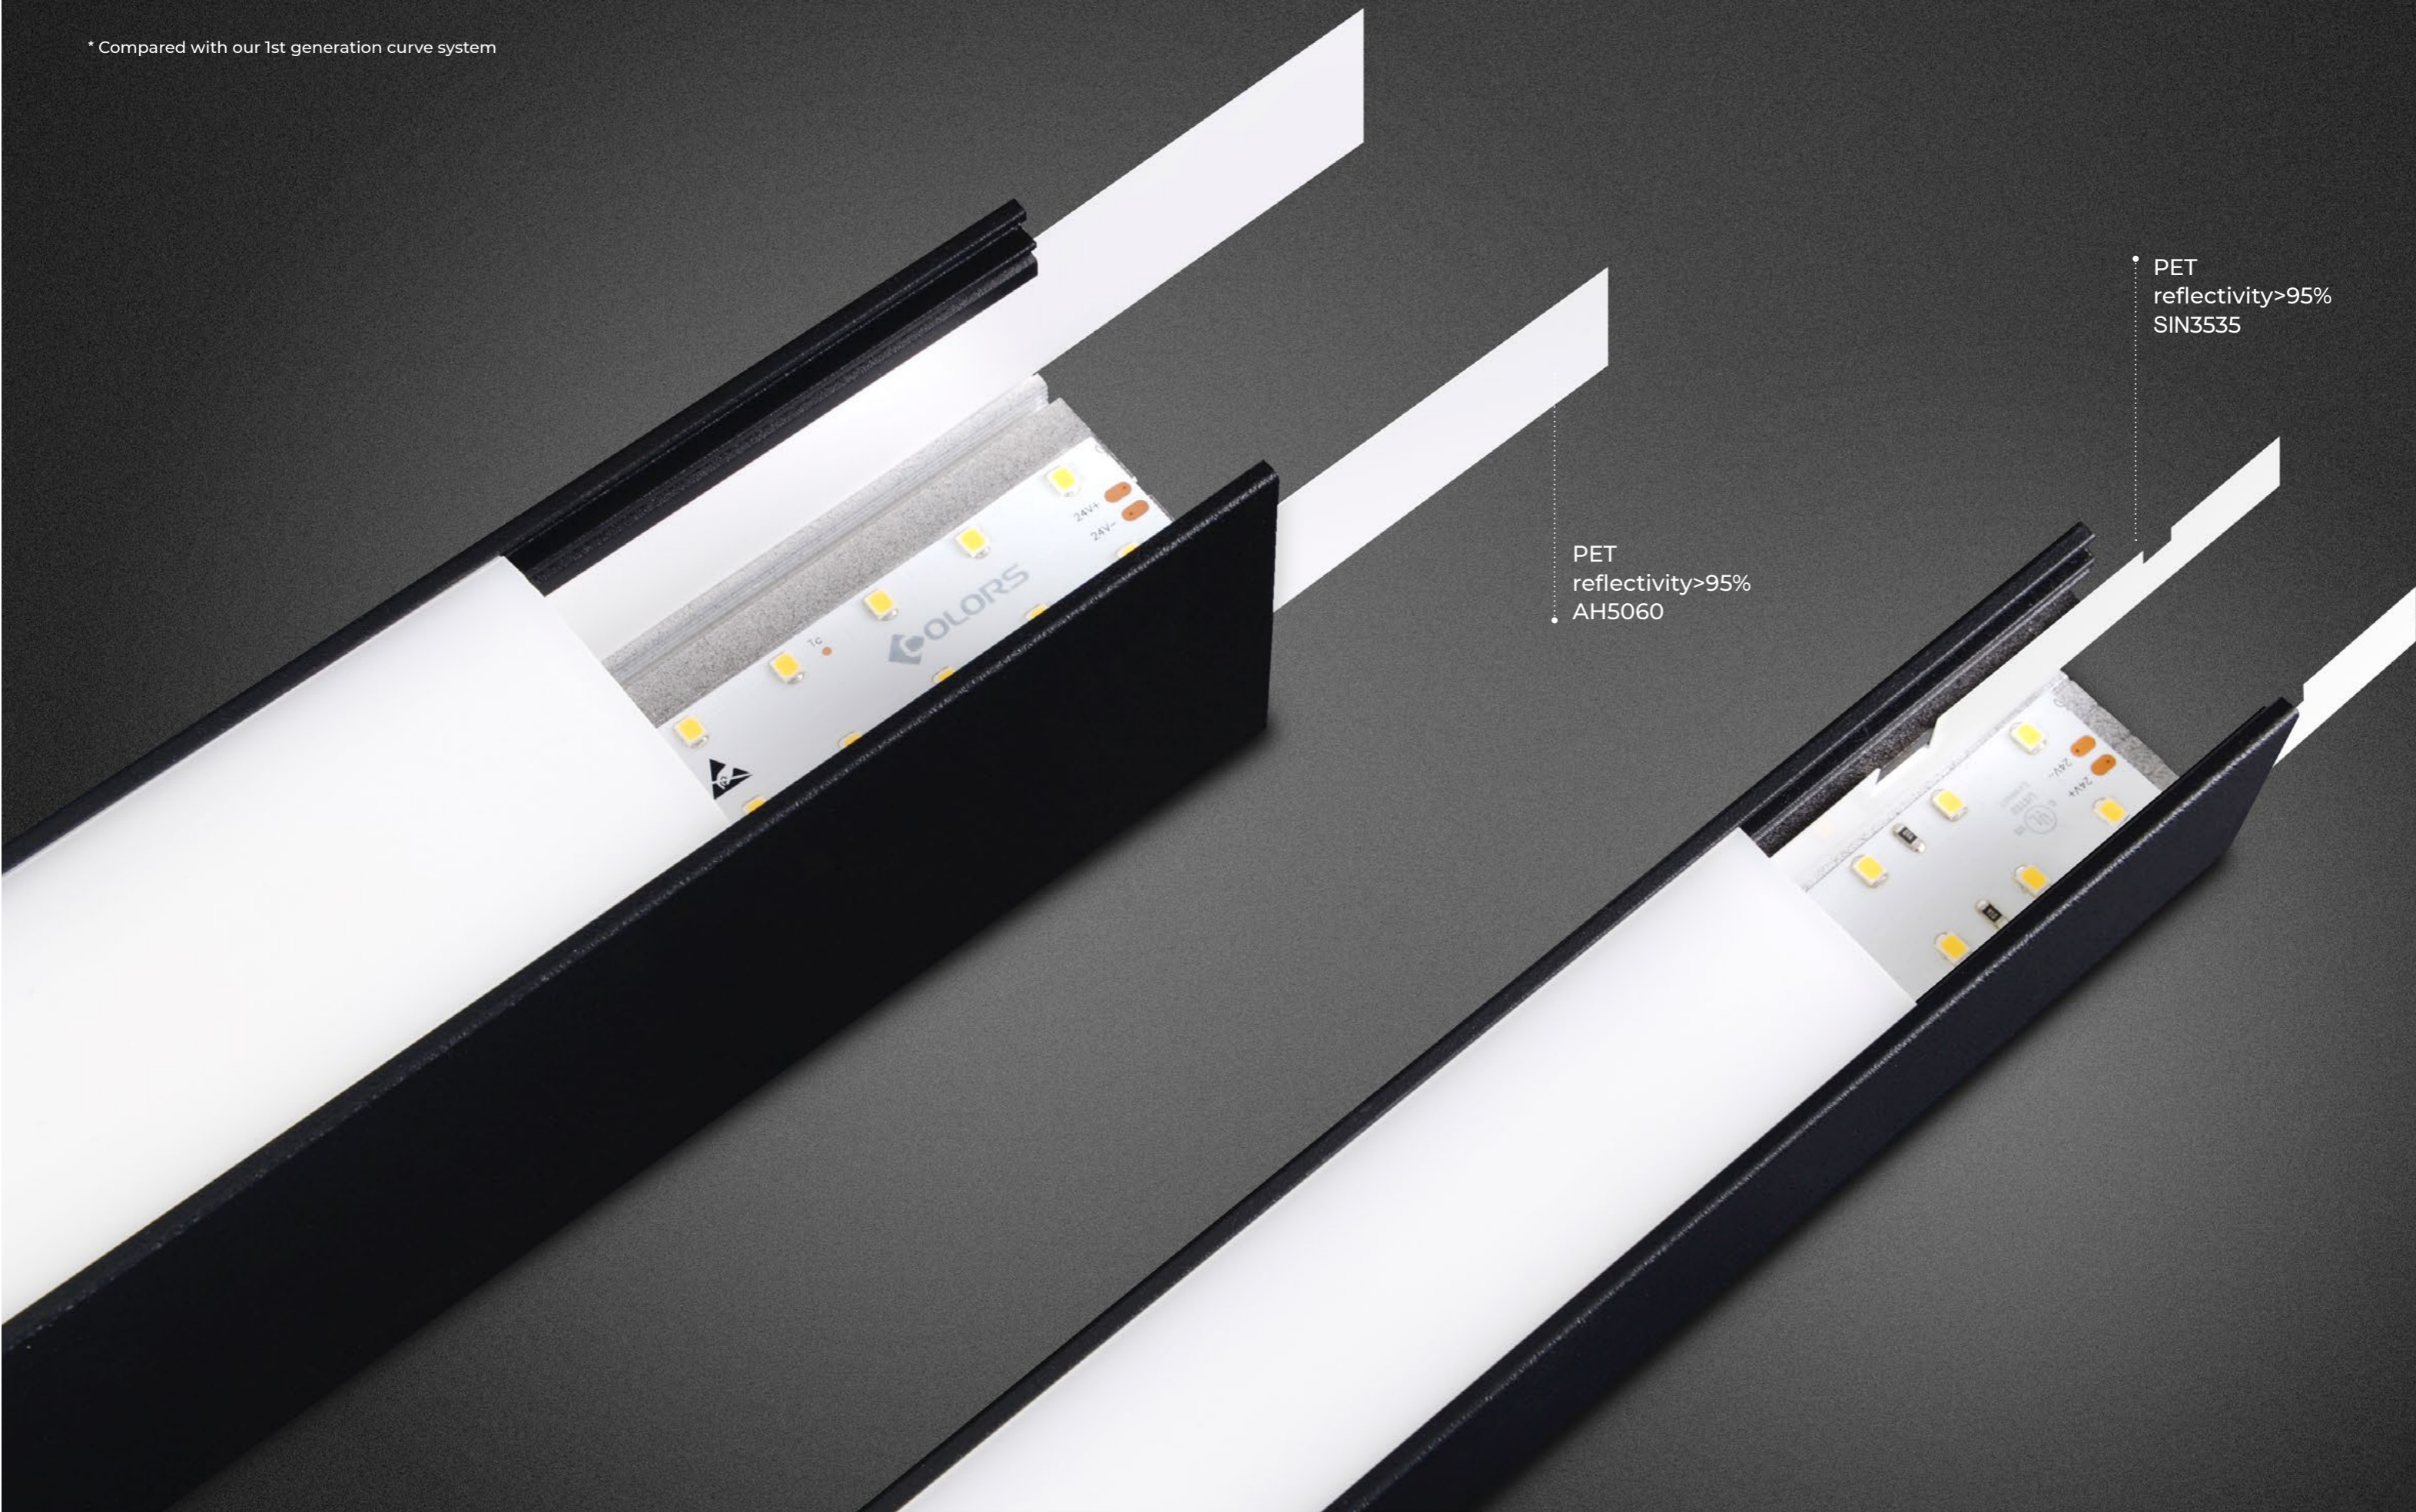


PET
reflectivity>95%
AH5060

PET
reflectivity>95%
SIN3535





Curve Lighting Solution

SIN3535
Series



Connectors

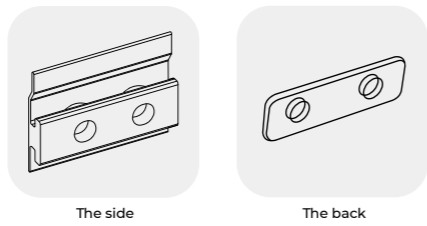


Installation accessories



Light source




Profile

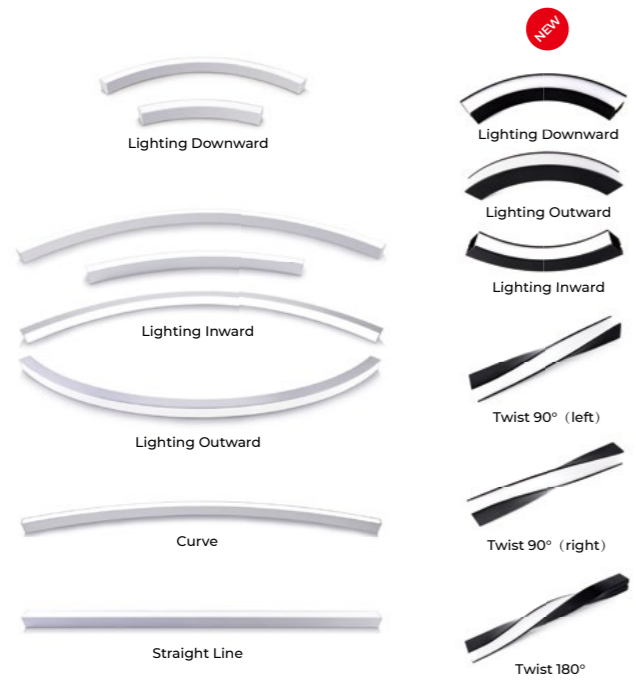

Diffuser



Application

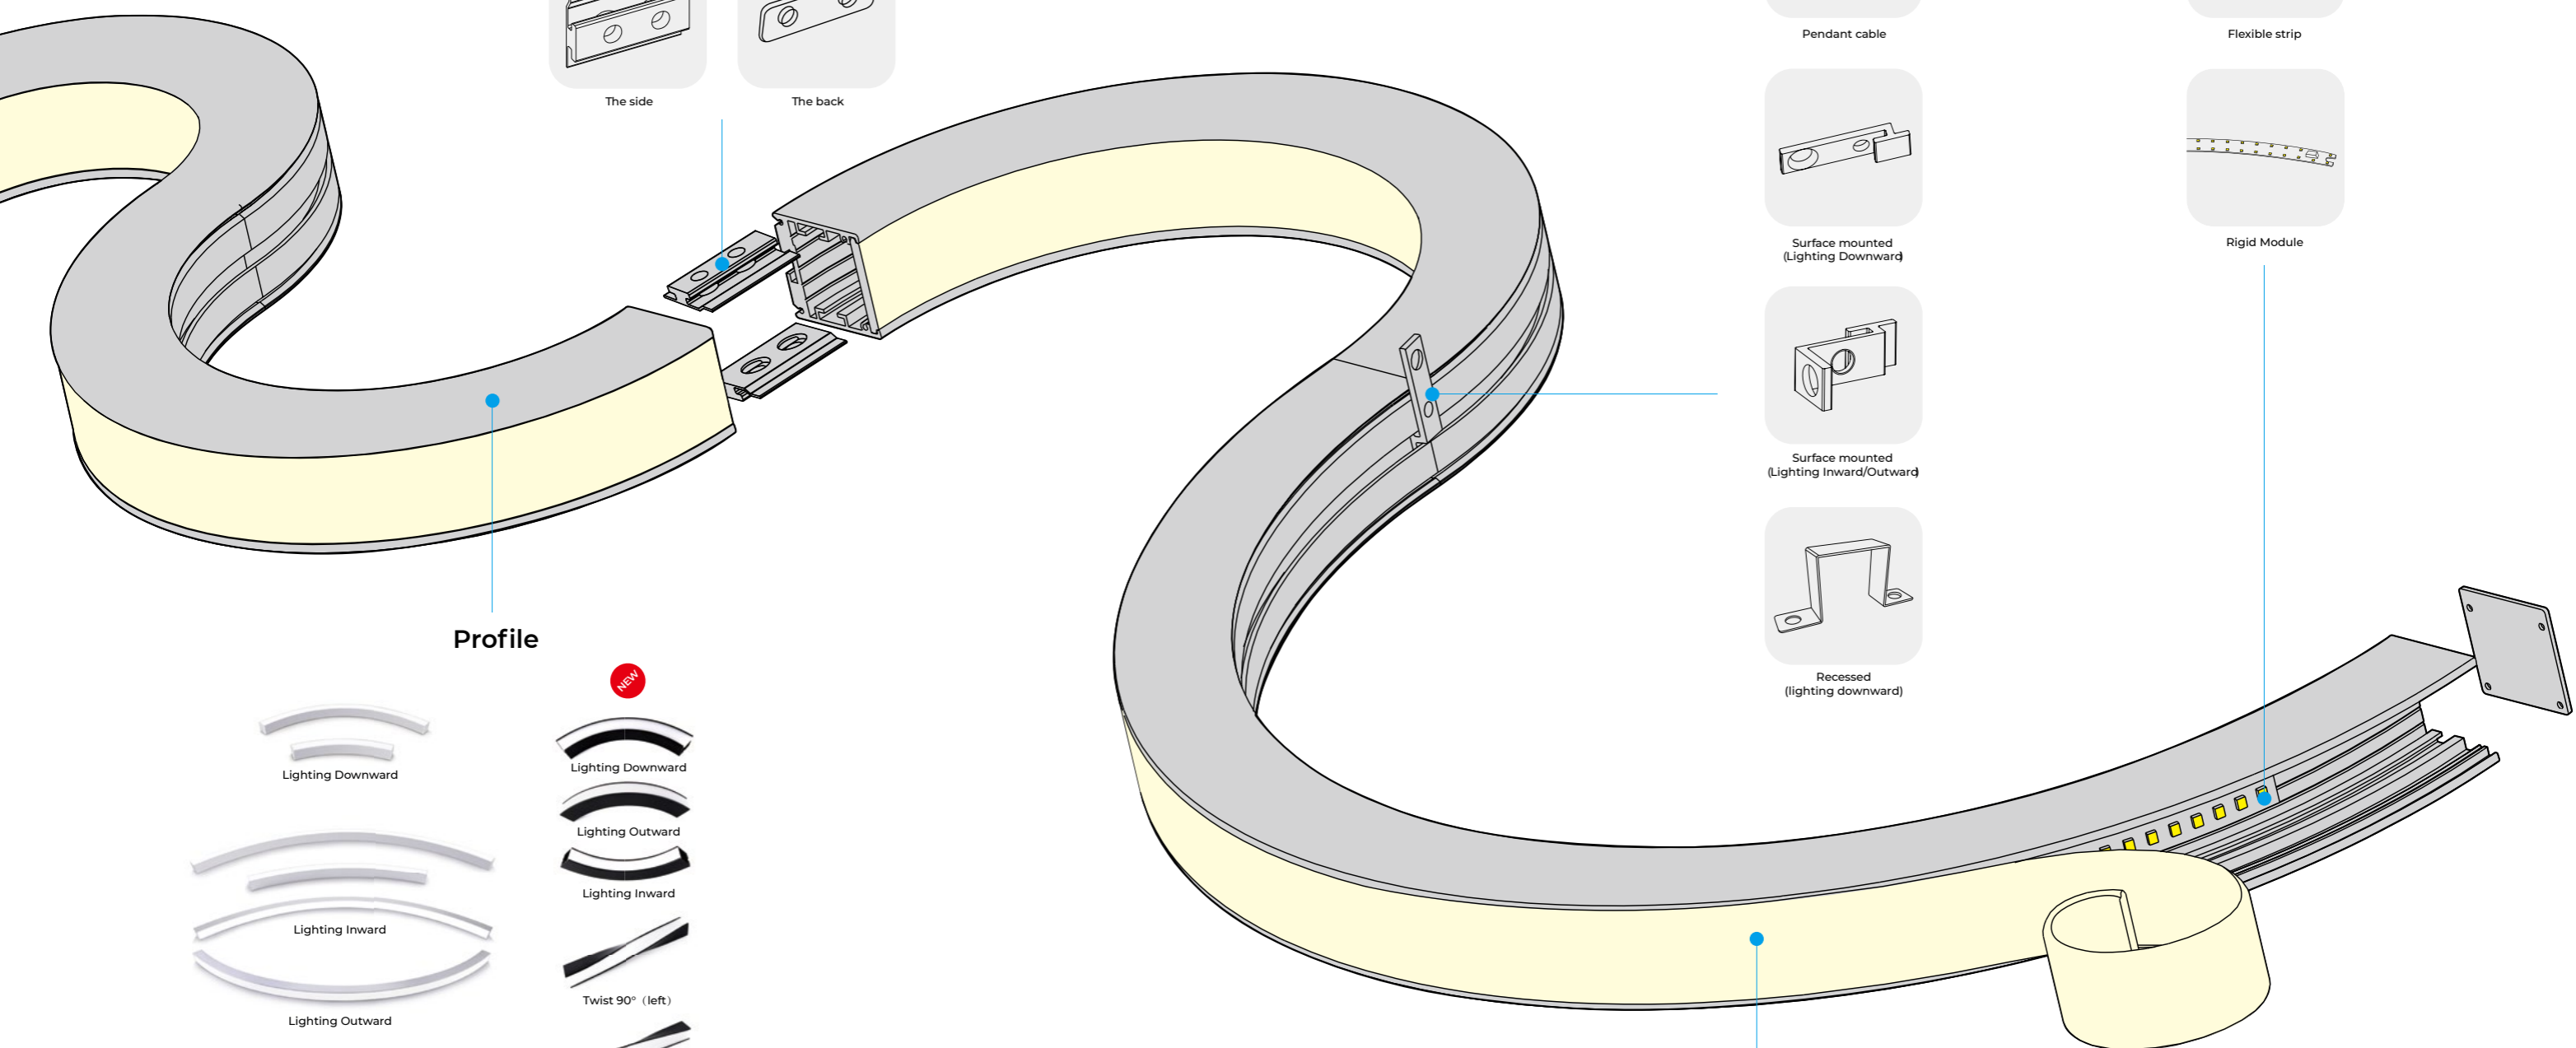

20m/roll

Suitable for all series


Circular

Curve

3D


Curve Lighting Solution

SIN5060
Series

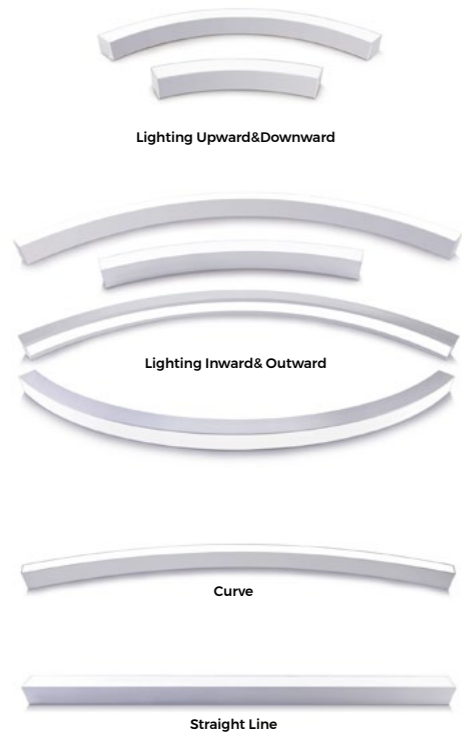


Profile


Light source



Flexible strip




Rigid Module

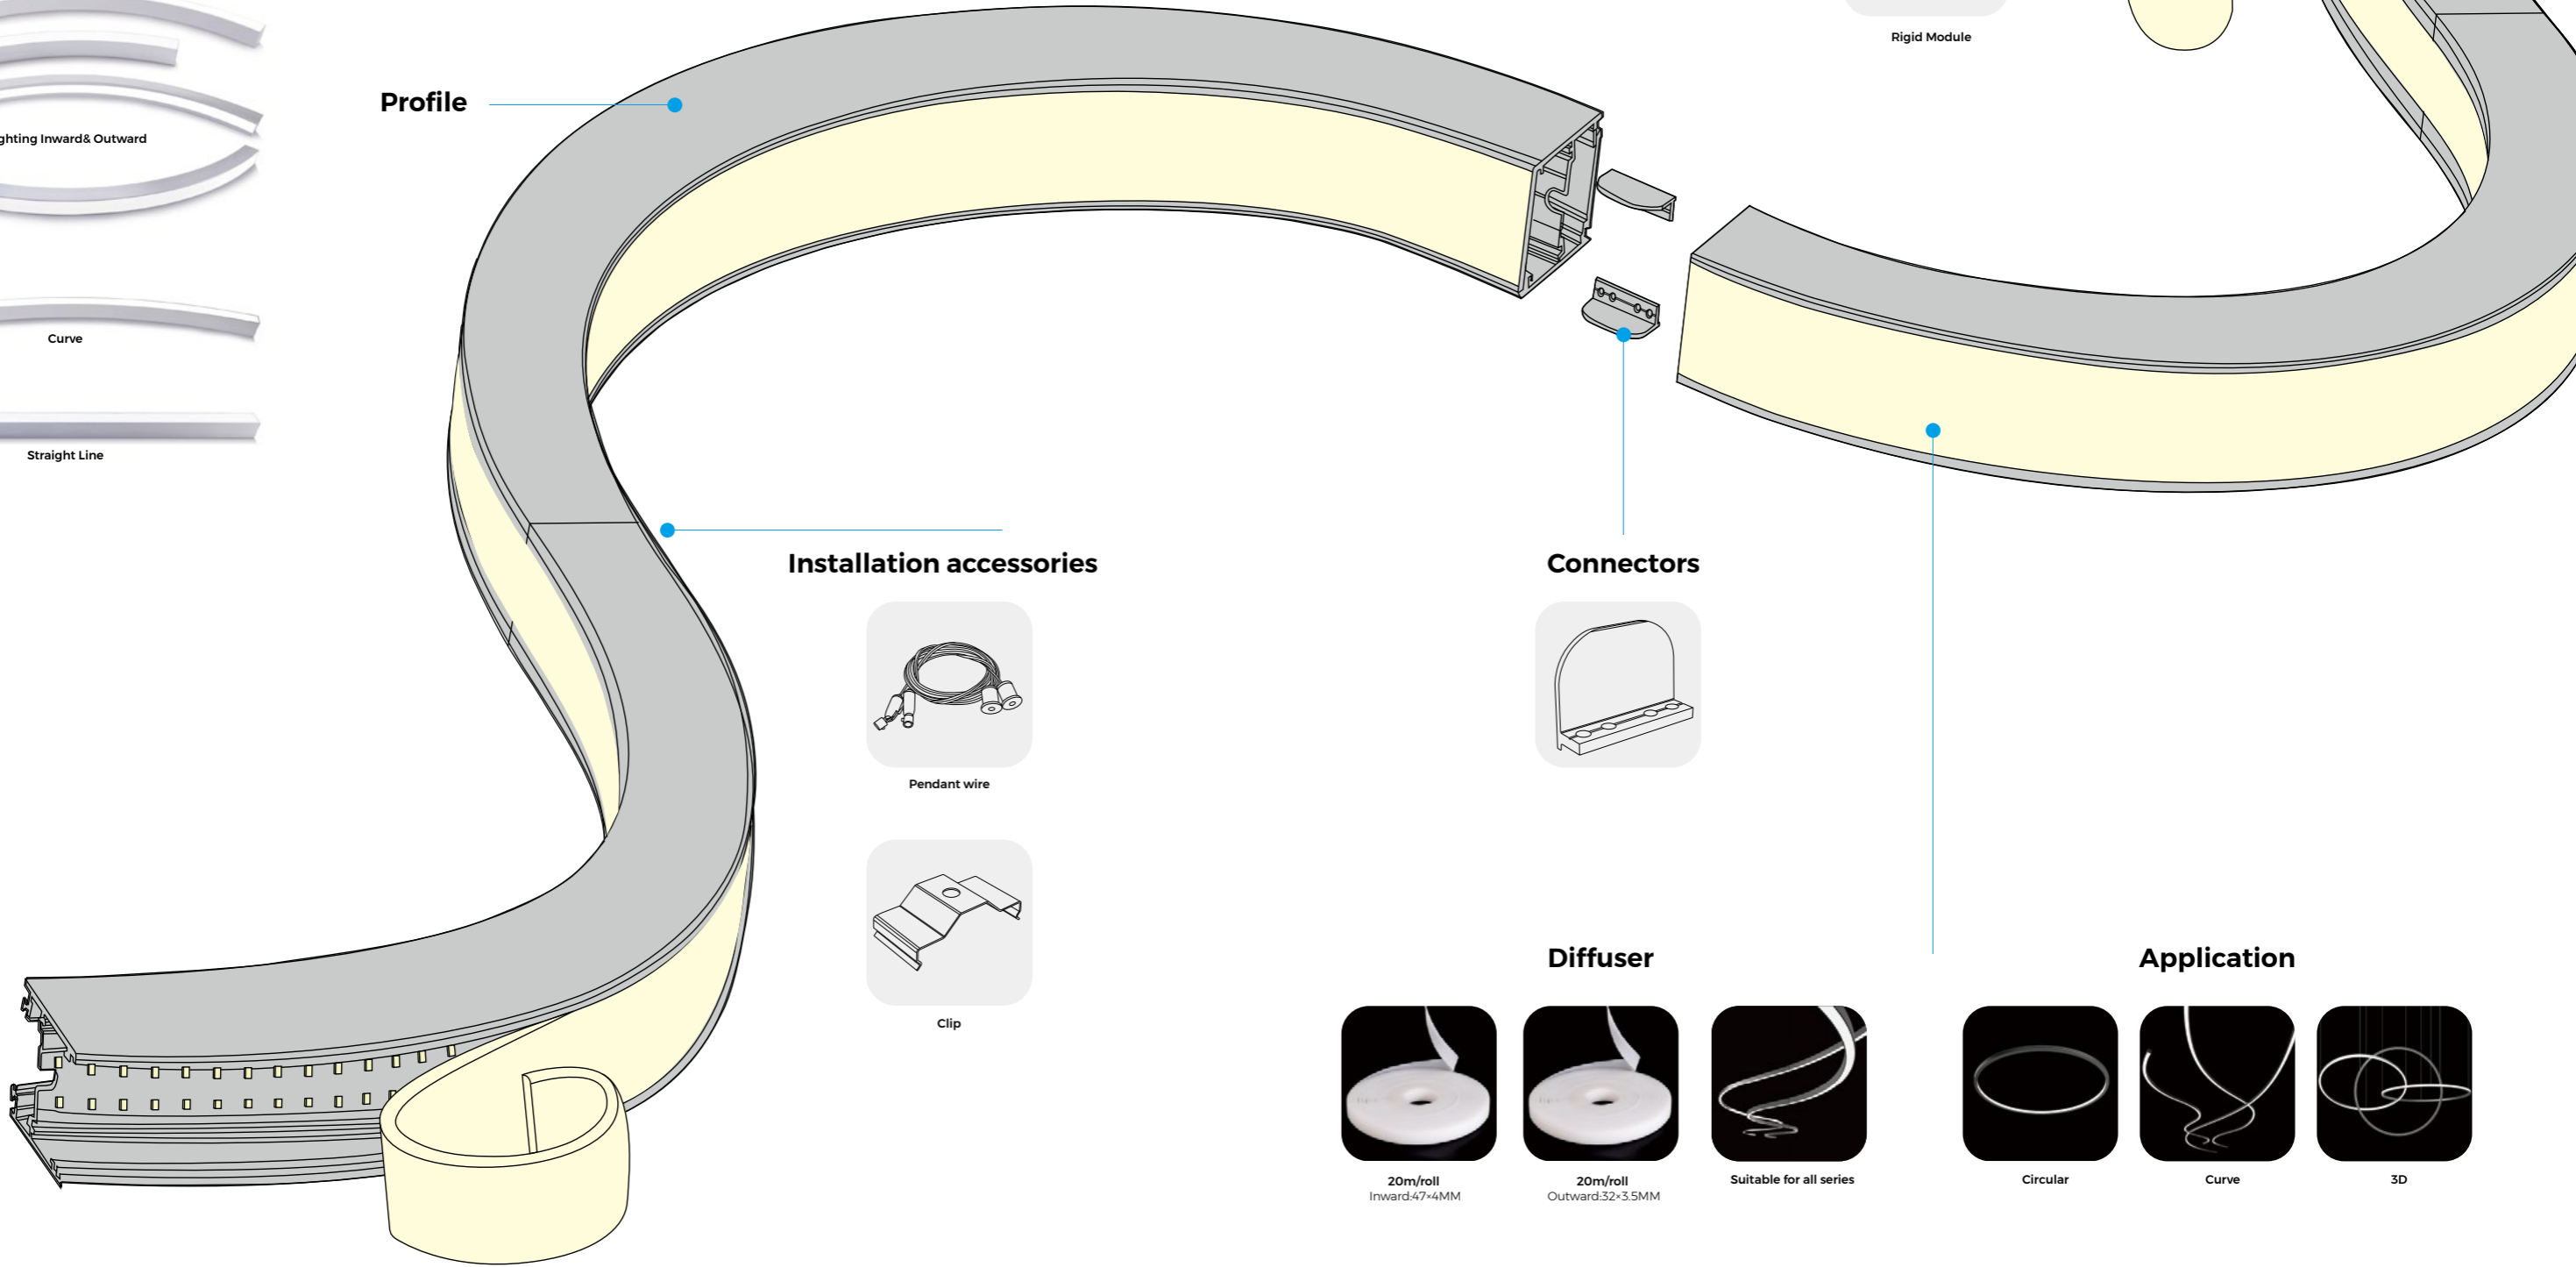

Installation accessories




Pendant wire



Clip

Connectors



Diffuser



20m/roll
Inward:47*4MM



20m/roll
Outward:32*3.5MM



Suitable for all series

Application



Circular



Curve



3D


Pendant



Pendant (Lighting Downward)



Pendant (Lighting Upward)

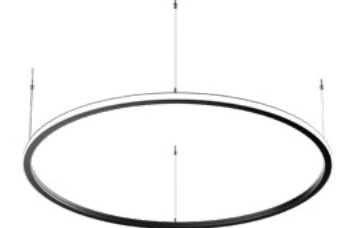

Pendant (Lighting Outward)



Pendant (Lighting Inward)



Pendant (Lighting Outward)



Pendant (Lighting Inward)




AS RESTRAINING AS THE POEM



Single Luminaire Use

The basic modules can constitute standard circular luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: lighting downward, lighting outward and lighting inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres. There are also multiple mounting methods optional: pendant, recessed, surface mounted and wall mounted, which are all perfectly compatible to the spacial structures of different areas, different rigidity and different materials.

Surface mounted & Recessed

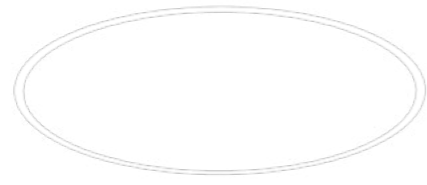

Recessed




Surface mounted (Lighting Downward)




Surface mounted (Lighting Outward)




Surface mounted (Lighting Inward)

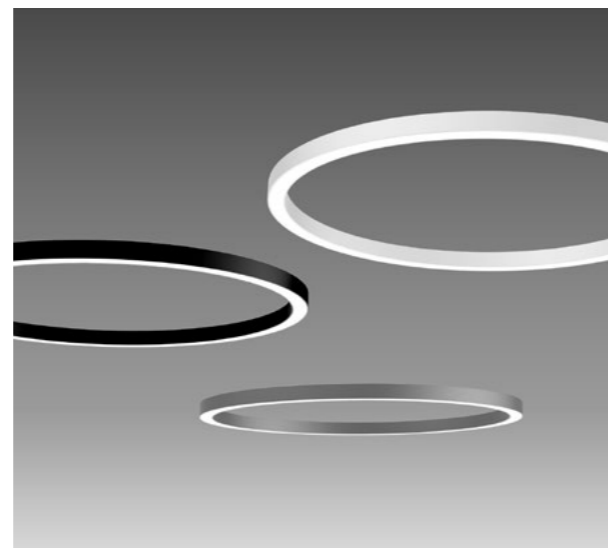


Wall mounted & Mounted away from the wall

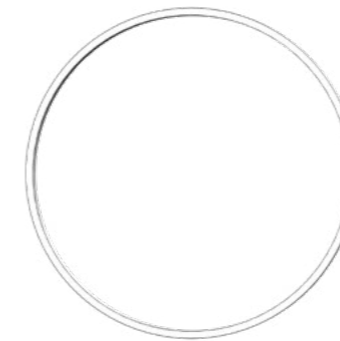


Wall mounted
(Lighting Downward)

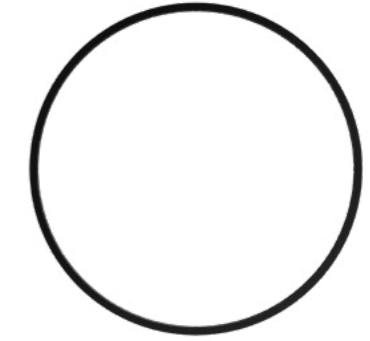

Wall mounted
(Lighting Outward)




Wall mounted
(Lighting Inward)

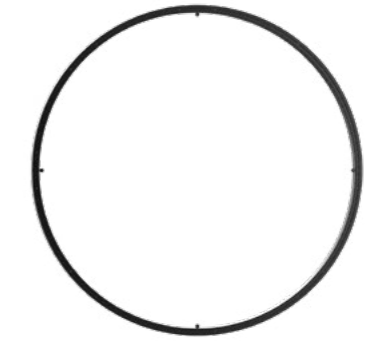

Mounted away from the wall
(Indirect illumination)




Limitless extension on the ceiling

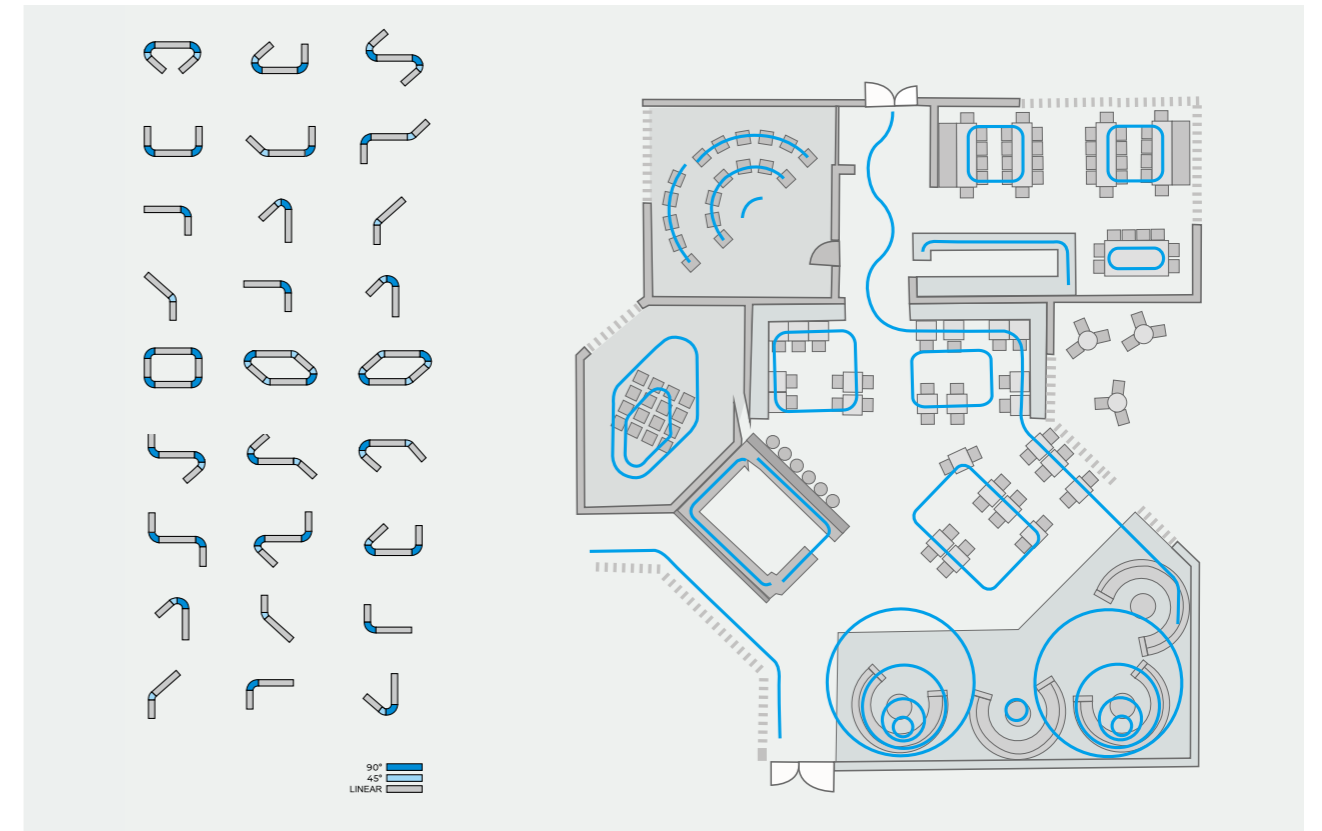

AS ENTHUSIASTIC AS THE DANCE

Interconnected Use



The straight lines in different lengths and curves with different radians can be combined and interconnected freely, they can be interconnected and extended on the ceiling for varieties of styles, or interconnected in vertical or horizontal space for pendant, or used freely in the 3D space along the edge of ceiling, wall and floor.

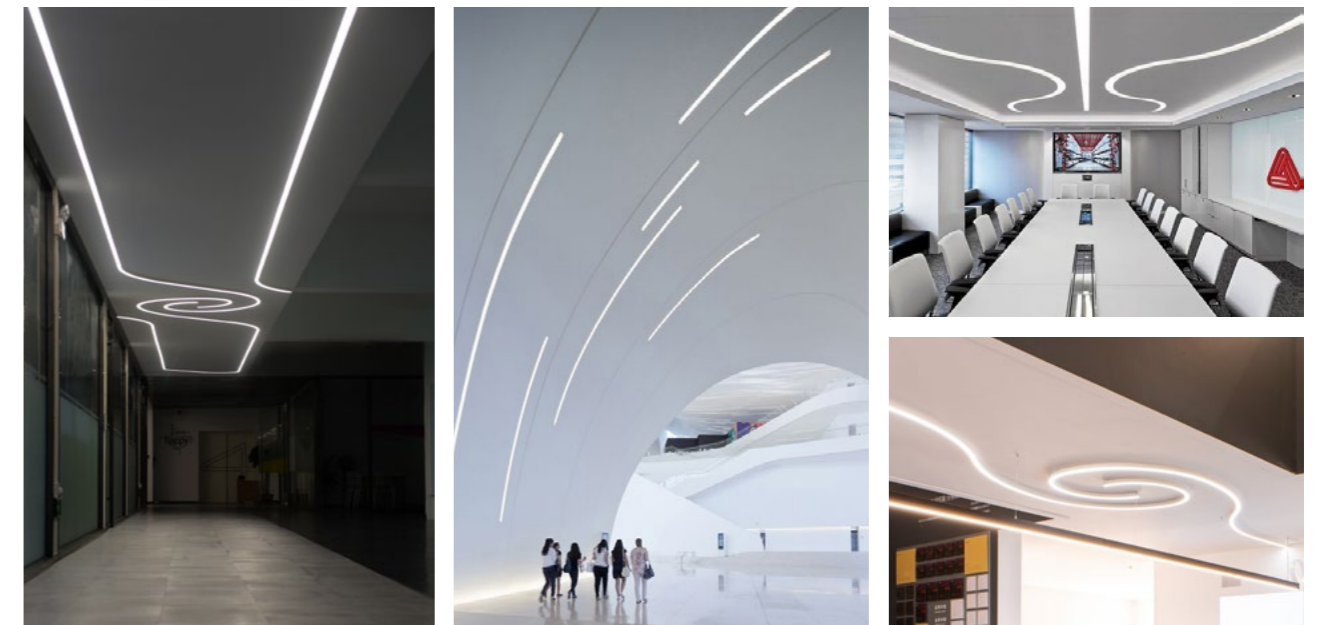


Free interconnection for pendant



Freely used in 3D space

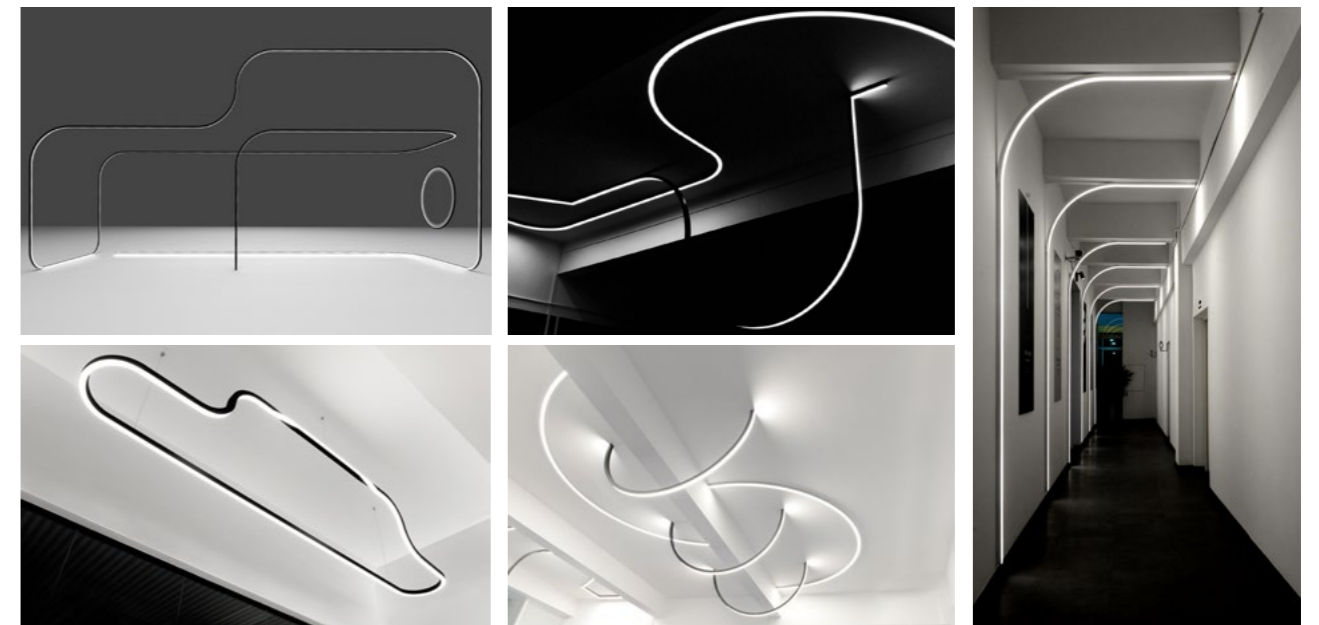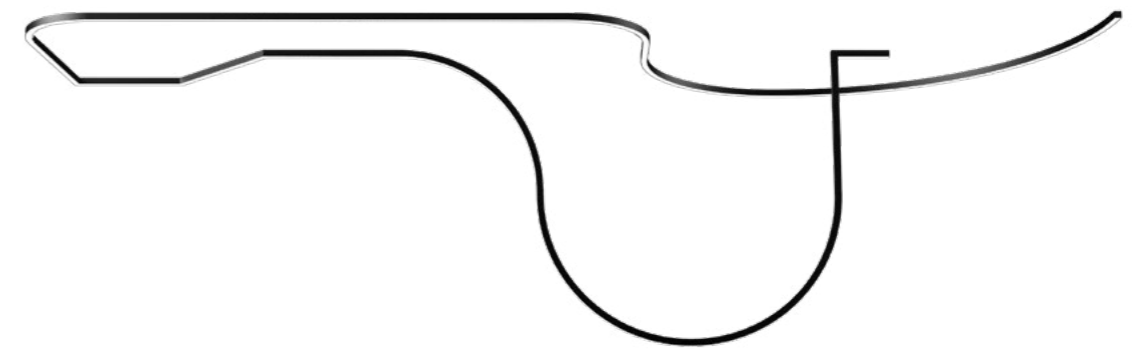

Orderly Arrangement

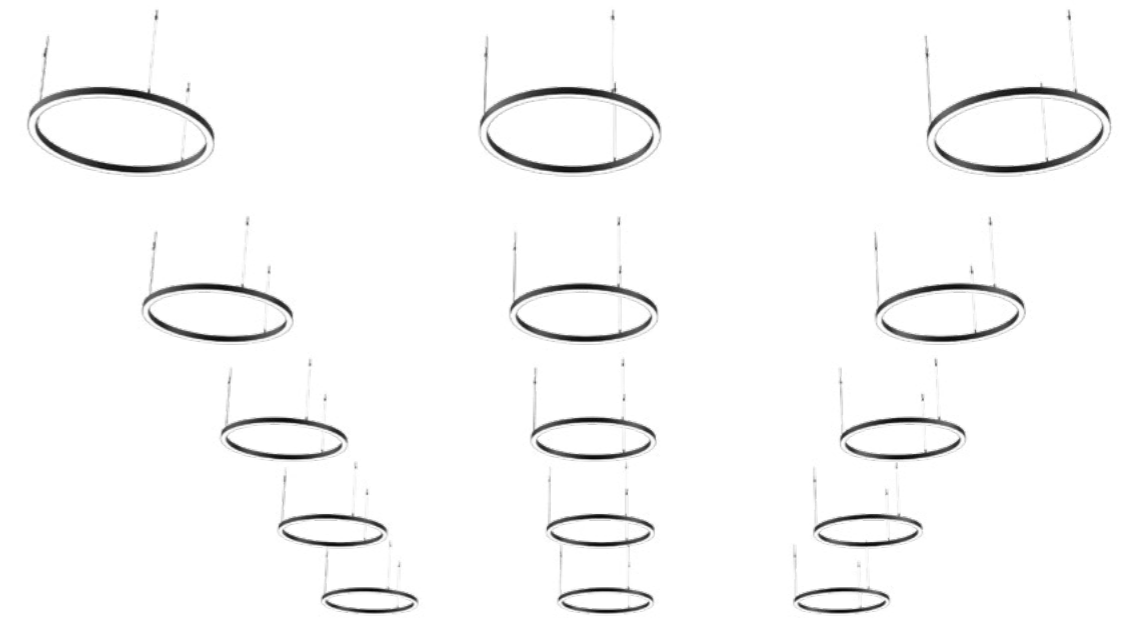


Combined Use

The whole-circular or curve modules with different diameters and light emitting directions can be arranged in orders, interspersed alternately, or combined disorderly.




AS ROMANTIC AS THE MUSIC

Crossed Combination

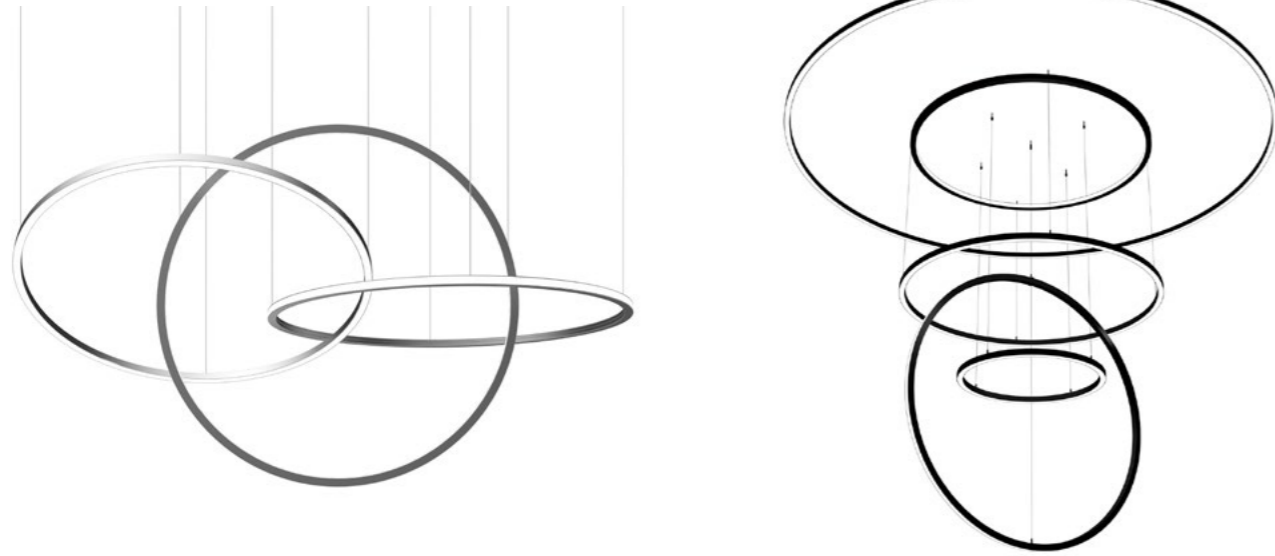

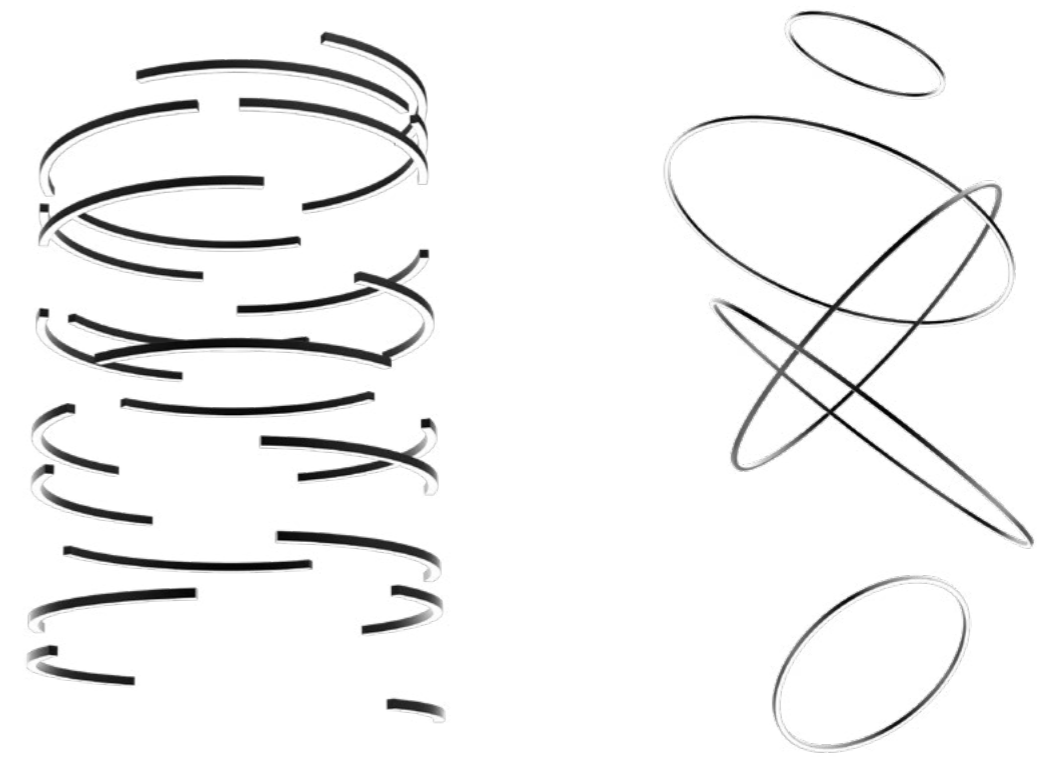























Disorderly Arrangement



Product List

Model	Drawing	Size WxH(mm),mm,Angle	Installation	Coating①	Lighting direction	Light source	Suitable diffuser
SIN3535 Series							
SIN3535-03A90		35X35,D320 90°			Downward	DY8140-24V-20mm-03A90	
SIN3535-03N90		35X35,D320 90°			Inward	DT8140-24V-20MM	
SIN3535-03W90		35X35,D320 90°			Outward	DT8140-24V-20mm	
SIN3535-04T90L		35X35X400			twist 90° left	DT8140-24V-20MM	
SIN3535-04T90R		35X35X400			twist 90° right	DT8140-24V-20MM	
SIN3535-05T180		35X35X500			twist 180°	DT8140-24V-20MM	
SIN3535-08A45/90		35x35, D800 45°/90°			Downward	DY8140-24V-20mm-08A45	
SIN3535-15A45/90		35x35, D1500 45°/90°			Downward	DY8140-24V-20mm-15A45	
SIN3535-30A45		35x35, D3000 45°			Downward	DY8140-24V-20mm-30A23	
SIN3535-2500		35x35x2500			Downward	DY8140-24V-20mm DT8140-24V-20MM	
SIN3535-15N90		35x35, D1500 90°			Inward	D8140-24V-20mm	
SIN3535-15W90		35x35, D1500 90°			Outward	D8140-24V-20mm	

Product List

Model	Drawing	Size WxH(mm),mm,Angle	Installation	Coating①	Lighting direction	Light source	Suitable diffuser
SIN5060 Series							
SIN5060-10A45/90		50x60, D1000 45°/90°			Upward&Downward	DY8140-24V-20mm-10A45	
SIN5060-15A45/90		50x60, D1500 45°/90°			Upward&Downward	DY8140-24V-20mm-15A45	
SIN5060-30A45		50x60, D3000 45°			Upward&Downward	DY8140-24V-20mm-30A23	
SIN5060-2500		50x60x2500			Upward&Downward	DY8140-24V-20mm DT8140-24V-20MM	
SIN5060-15N90		50x60, D1500 90°			Inward&Outward	D8140-24V-20mm	
SIN5060-15W90		50x60, D1500 90°			Inward&Outward	D8140-24V-20mm	

Light Source for LLS-C

Model	Drawing	LEDs	LEDs/cut	Entry Cable	DC(V)	Max.	Typ.	LM(4000K)	CRI	CCT/Color	Size	Package	Suitable profile
Flexible light source													
D8140-24V-20mm		140/m	14/98mm		24	21.1W/m	19.2W/m	2120LM/m	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	4712x20x1.5mm	4.7M/Roll	SIN3535
DT8140-24V-20mm		140/m	14/100mm		24	21.1W/m	19.2W/m	2490LM/m	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	5000x20x1.5mm	5M/Roll	
Rigid modular													
DY8140-24V-20mm		70/pcs	14/100mm		24	10.6W/pcs	9.6W/pcs	1060LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K	499x20x5.8mm	20pcs/Set	SIN3535-2500 SIN 5060-2500
DY8140-24V-20mm-08A45		42/pcs	14		24	6.4W/pcs	5.8W/pcs	650LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		8pcs/Set	SIN3535-08A45 SIN3535-08A90
DY8140-24V-20mm-10A45		56/pcs	14		24	8.3W/pcs	7.5W/pcs	820LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	SIN5060-10A45 SIN5060-10A90
DY8140-24V-20mm-15A45		84/pcs	14		24	12.8W/pcs	11.6W/pcs	1300LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	SIN3535-15A45 SIN3535-15A90 SIN5060-15A45 SIN5060-15A90
DY8140-24V-20mm-30A23		84/pcs	14		24	12.8W/pcs	11.6W/pcs	1300LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		10pcs/Set	SIN3535-30A45 SIN5060-30A45
DY8140-24V-20MM-03A90		42/pcs	14		24	6W/pcs	5.4W/pcs	700LM/pcs	>80	1900 K 2300 K 2700 K 3000 K 3500 K 4000 K 5000 K 6000 K		8PCS/SET	SIN3535-03A90


SIN3535-03A90

- $\phi 0.32M$ 90° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

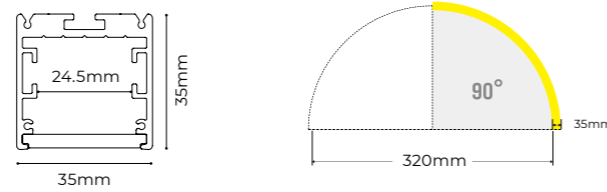

Profile components

Profile	PR-SIN3535-03A90 35x35mm, D320mm, 90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78x34x15mm	

Ordering Code

Category		Series		Section Size		Profile Color		Length
SINUM	PR	-	Pendant/surface mounted/ recessed	SIN	3535	Silver White Black	S W B	$\phi 320mm$ lighting down 90°
	PR	-		SIN	3535		B	03A90

Ordering profile components


SIN3535-03N90

- $\phi 0.32M$ 90° arc (lighting inward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Inward

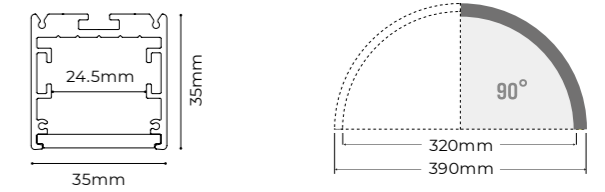

Profile components

Profile	PR-SIN3535-03N90 35x35mm, D320mm, 90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	


Ordering Code

Category		Series		Section Size		Profile Color		Length
SINUM	PR	-	Pendant/surface mounted	SIN	3535	Silver White Black	S W B	$\phi 150mm$ lighting inward 90°
	PR	-		SIN	3535		B	15N90

Ordering profile components


Lighting Source

Rigid modular							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm-03A90	>80	700LM/M	24V	5.4W/m	D320x90°x20x5.8mm	42LEDs	14LEDs

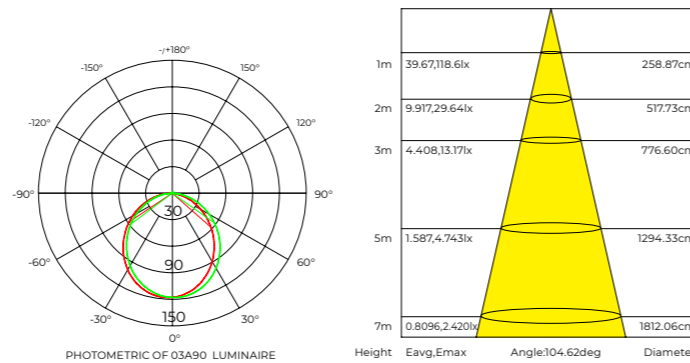

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x15mm	140LEDs	100mm/14LEDs

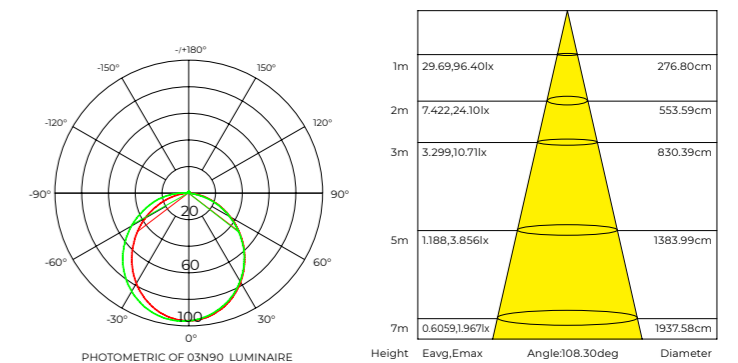


SIN3535-03W90

- $\phi 0.32M$ 90° arc (lighting outward), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Outward

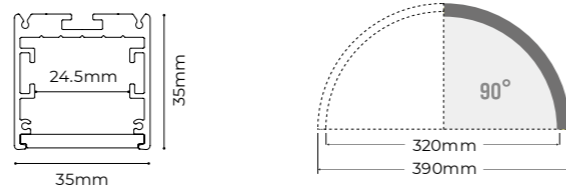

Profile components


Profile	PR-SIN3535-03W90 35x35mm, D320mm, 90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

Lighting Source

Flexible strip	<input checked="" type="checkbox"/> 1900K <input type="checkbox"/> 2300K <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K
Model	CRI Lumens (4000K) Voltage Typ.power Size LEDs/m Cutting unit
DT8140-24V-20mm	>80 2490LM/M 24V 19.2W/m 5000x20x1.5mm 140LEDs 100mm/14LEDs

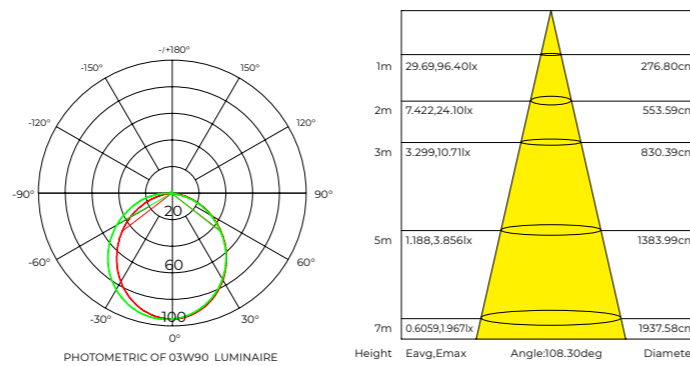

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUM	PR -	Pendant/surface mounted	SIN 3535	Silver S $\phi 320mm$ lighting outward 90°
			White W	
			Black B	
	PR -		SIN 3535	Black B 03W90

Ordering profile components


SIN3535-04T90L

- 0.4M twist 90° left, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

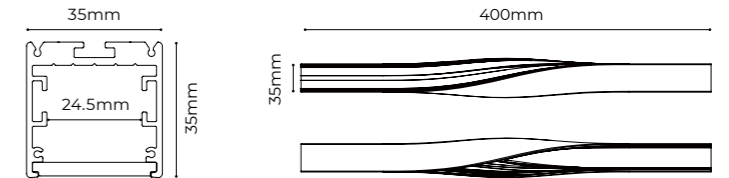

Profile components


Profile	PR-SIN3535 35x35x400mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

Lighting Source

Flexible strip	<input checked="" type="checkbox"/> 1900K <input type="checkbox"/> 2300K <input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K
Model	CRI Lumens (4000K) Voltage Typ.power Size LEDs/m Cutting unit
DT8140-24V-20mm	>80 2490LM/M 24V 19.2W/m 5000x20x1.5mm 140LEDs 100mm/14LEDs

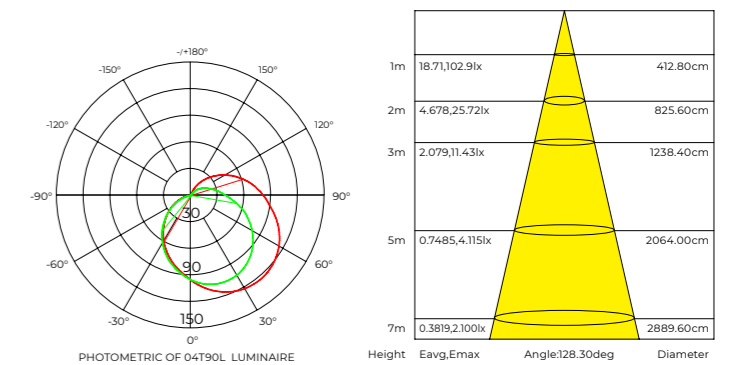

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUM	PR -	Pendant	SIN 3535	Silver S 400MM twist 90° left
			White W	
			Black B	
	PR -		SIN 3535	Black B 04T90L

Ordering profile components


SIN3535-04T90R

- 0.4M twist 90° right, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	<input type="radio"/> Spraying RAL9003 <input checked="" type="radio"/> Spraying RAL9005 <input type="radio"/> Spraying
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

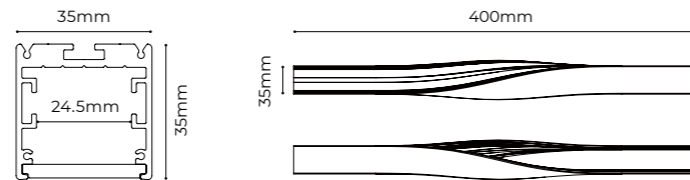

Profile components


Profile	PR-SIN3535 35x35x400mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Lighting Source

Flexible strip	<input checked="" type="radio"/> 1900 K <input type="radio"/> 2300 K <input type="radio"/> 2700 K <input type="radio"/> 3000 K <input type="radio"/> 3500 K <input type="radio"/> 4000 K <input type="radio"/> 5000 K <input type="radio"/> 6000 K							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

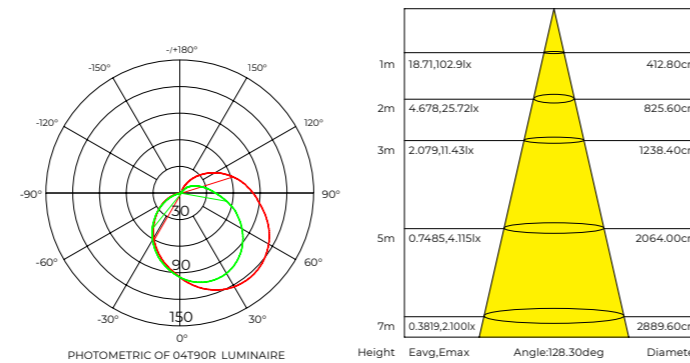

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	-	Pendant	SIN 3535
				Silver S
				White W
				Black B
				400MM twist 90° right
				PR - SIN 3535 B 04T90R

Ordering profile components


SIN3535-05T180

- 0.5M twist 180°, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	<input type="radio"/> Spraying RAL9003 <input checked="" type="radio"/> Spraying RAL9005 <input type="radio"/> Spraying
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

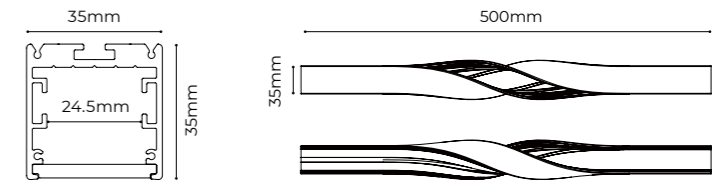

Profile components


Profile	PR-SIN3535 35x35x500mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Lighting Source

Flexible strip	<input checked="" type="radio"/> 1900 K <input type="radio"/> 2300 K <input type="radio"/> 2700 K <input type="radio"/> 3000 K <input type="radio"/> 3500 K <input type="radio"/> 4000 K <input type="radio"/> 5000 K <input type="radio"/> 6000 K							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit	
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x1.5mm	140LEDs	100mm/14LEDs	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	

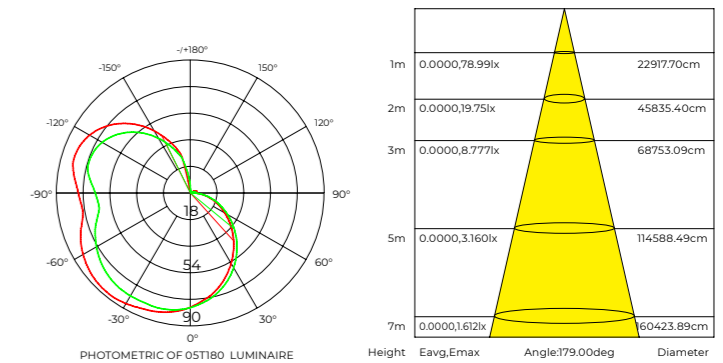


Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUM	PR	-	Pendant	SIN 3535
				Silver S
				White W
				Black B
				500MM twist 180°
				PR - SIN 3535 B 05T180

Ordering profile components


SIN3535-08A45/90

- $\phi 0.8m$ 45° / 90° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

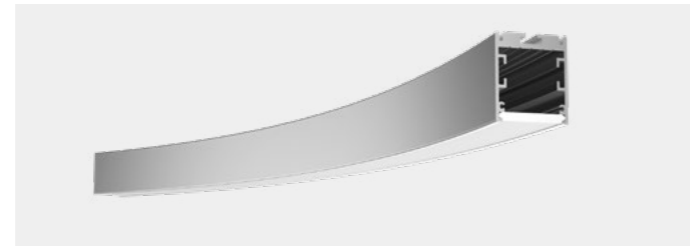

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input checked="" type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

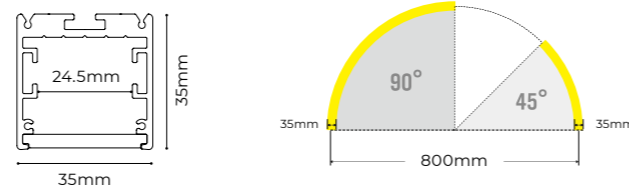

Profile components

Profile	PR-SIN3535-08A45/90 35X35mm,D800mm,45°/90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35X35X1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBCA $\phi 250 \times 20 \times 0.6mm$	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78X34X15mm	

Interconnection Accessories

Connector	EX-26 30X23.5X4.6mm	
-----------	------------------------	--


Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	SIN	Silver White Black	$\phi 800mm$ lighting downward 45° $\phi 800mm$ lighting downward 90°
	PR	SIN	B	OBA45

Ordering profile components


SIN3535-15A45/90

- $\phi 1.5m$ 45° / 90° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

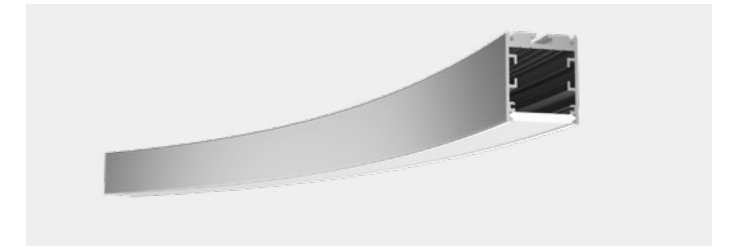

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input checked="" type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

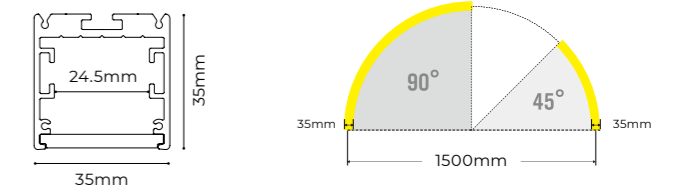

Profile components

Profile	PR-SIN3535-15A45/90 35X35mm,D1500mm,45°/90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35X35X1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB $\phi 350 \times 20 \times 0.6mm$	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78X34X15mm	



Interconnection Accessories

Connector	EX-26 L30X23.5X4.6mm	
-----------	-------------------------	--

Ordering Code


Category	Series	Section Size	Profile Color	Length
SINUM	PR	SIN	Silver White Black	$\phi 1500mm$ lighting downward 45° $\phi 1500mm$ lighting downward 90°
	PR	SIN	B	15A45

Ordering profile components

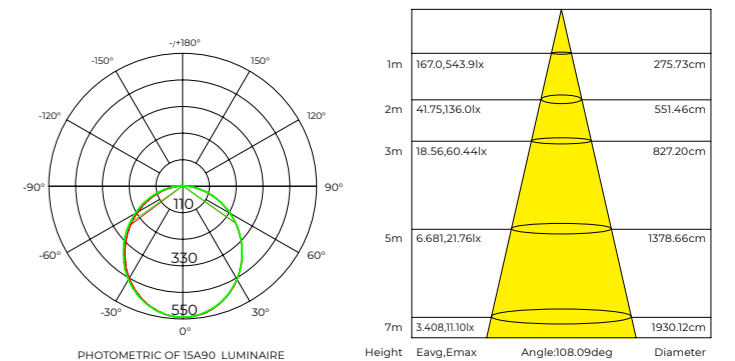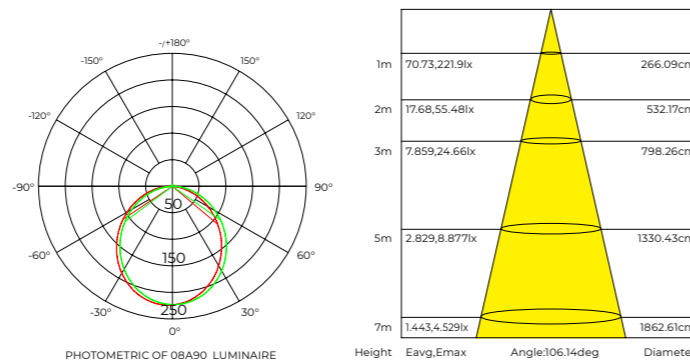


SIN3535-30A45

- Φ 3m 45° arc, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

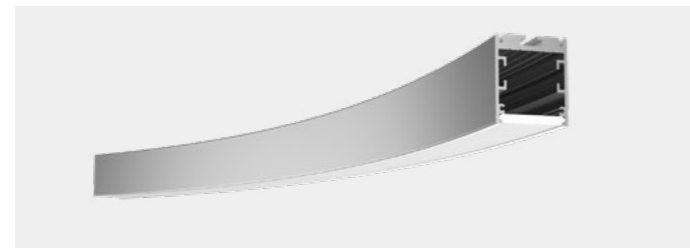

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input checked="" type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

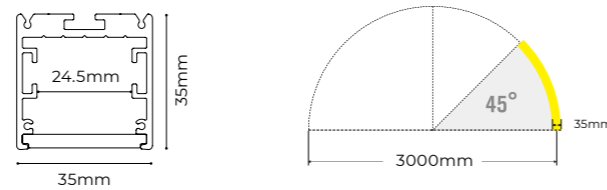

Profile components

Profile	PR-SIN3535-30A45 35x35mm,D3000mm,45°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78x34x15mm	

Interconnection Accessories

Connector	EX-26 L30x23.5x4.6mm	
-----------	-------------------------	--


Ordering Code

Category		Series		Section Size		Profile Color		Length
SINUS	PR	-	Pendant/surface mounted/ recessed	SIN	3535	Silver	S	Φ 3000mm lighting downward 45°
						White	W	
						Black	B	
	PR	-		SIN	3535		B	30A45

Ordering profile components


SIN3535-2500

- 2500m straight line, thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, recessed and surface mounted

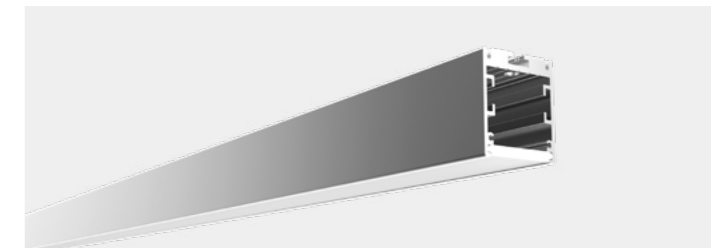

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input checked="" type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Downward

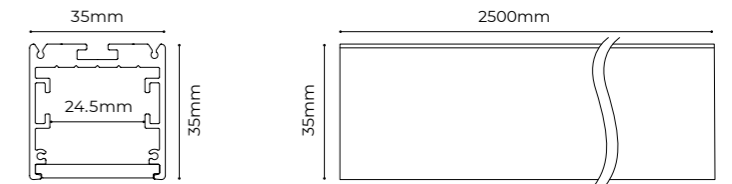

Profile components

Profile	PR-SIN3535 35x35x2500mm	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface buckle	CL-05	
Screw set	CL-01 M3.5x40mm	
Recessed buckle	RE-13 78x34x15mm	

Interconnection Accessories

Connector	EX-26 30x23.5x4.6mm	
-----------	------------------------	--


Ordering Code

Category		Series		Section Size		Profile Color		Length
SINUS	PR	-	Pendant/surface mounted/ recessed	SIN	3535	Silver	S	2500mm lighting downward
						White	W	
						Black	B	
	PR	-		SIN	3535		B	2500

Ordering profile components


SIN3535-15N90

- ϕ 1.5m 90° arc (lighting inward), thousands of styles come from connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted

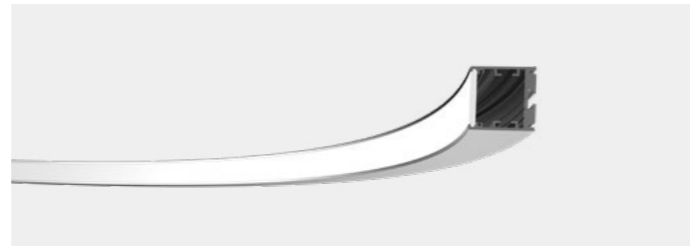

Basic Parameters

Profile material	AL6063-T5
Surface processing	<input type="radio"/> Spraying RAL9003 <input checked="" type="radio"/> Spraying RAL9005 <input type="radio"/> Spraying
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Inward

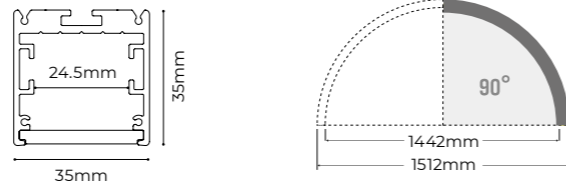

Profile components


Profile	PR-SIN3535-15N90 35x35mm, D1500mm, 90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Lighting Source

Flexible strip	<input checked="" type="checkbox"/> 1900 K <input type="checkbox"/> 2300 K <input type="checkbox"/> 2700 K <input type="checkbox"/> 3000 K <input type="checkbox"/> 3500 K <input type="checkbox"/> 4000 K <input type="checkbox"/> 5000 K <input type="checkbox"/> 6000 K						
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DB140-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB ϕ 350x20x0.6mm	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

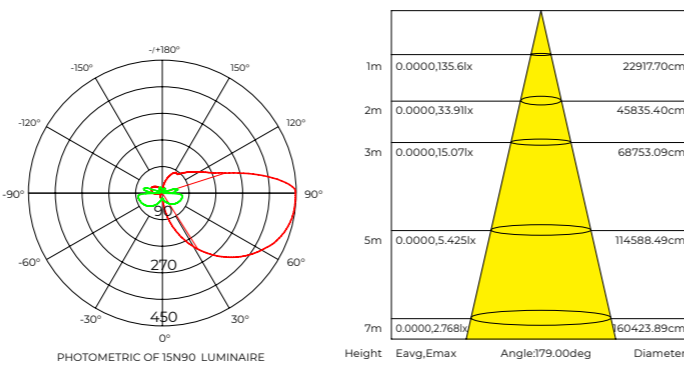

Interconnection Accessories

Connector	EX-26 L30X23.5X4.6mm	
-----------	-------------------------	--

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	-	Pendant/surface mounted	SIN 3535
				Silver S
				White W
				Black B
	PR	-		SIN 3535 B 15N90

Ordering profile components


SIN3535-15W90

- ϕ 1.5m 90° arc (lighting outward), thousands of styles come from connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant and surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	<input type="radio"/> Spraying RAL9003 <input checked="" type="radio"/> Spraying RAL9005 <input type="radio"/> Spraying
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Outward

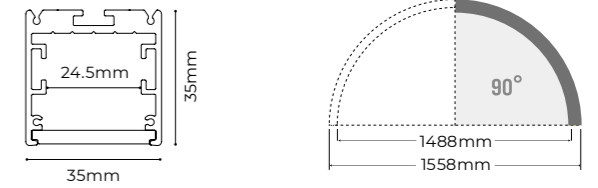

Profile components


Profile	PR-SIN3535-15W90 35x35mm, D1500mm, 90°	
Diffuser	CV-AS3535-20000 20m	
End cap	EC-AS3535 35x35x1.5mm	

Lighting Source

Flexible strip	<input checked="" type="checkbox"/> 1900 K <input type="checkbox"/> 2300 K <input type="checkbox"/> 2700 K <input type="checkbox"/> 3000 K <input type="checkbox"/> 3500 K <input type="checkbox"/> 4000 K <input type="checkbox"/> 5000 K <input type="checkbox"/> 6000 K						
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DB140-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB ϕ 350x20x0.6mm	
Surface buckle	CL-04	
Screw set	CL-01 M3.5x40mm	

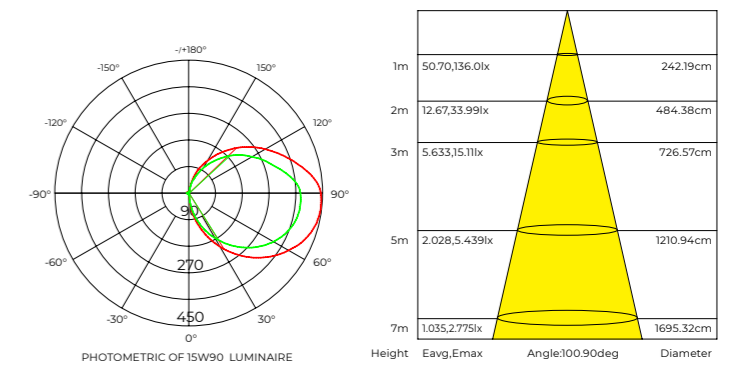

Interconnection Accessories

Connector	EX-26 L30X23.5X4.6mm	
-----------	-------------------------	--

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	-	Pendant/surface mounted	SIN 3535
				Silver S
				White W
				Black B
	PR	-		SIN 3535 B 15W90

Ordering profile components



SIN5060-10A45/90 NEW

- Φ 1m 45°/90° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input checked="" type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

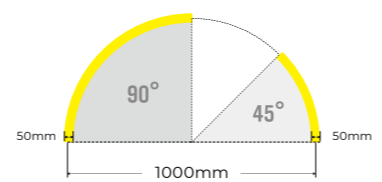

Profile components

Profile	PR-SIN5060-10A45/90 50x60,DI1000mm,45°/90°	
50 Diffuser	CV-AH5060-20000 L20000xW47xH4mm	
35 Diffuser	CV-AH5060-20000 L20000xW32xH3.5mm	
End cap	EC-AH5060 L60xW50xH2mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBCA Φ 250x20x0.6mm	
Surface Mounted Screw set	CL-15 M3.5x50mm	
Clips	CP-29 39.5x20x12mm	

Interconnection Accessories

Connector	EX-25 39.5x20x12mm	
-----------	-----------------------	--

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	SIN	Silver White Black	Φ 1000mm up-down double lighting 45° Φ 1000mm up-down double lighting 90°
	PR	SIN	B	10A45

Ordering profile components



SIN5060-15A45/90 NEW

- Φ 1.5m 90° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Various installation ways: pendant, surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input checked="" type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

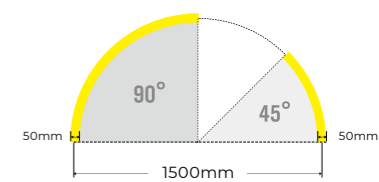

Profile components

Profile	PR-SIN5060-15A45/90 50x60,DI1500mm,45°/90°	
50 Diffuser	CV-AH5060-20000 L20000xW47xH4mm	
35 Diffuser	CV-AH5060-20000 L20000xW32xH3.5mm	
End cap	EC-AH5060 L60xW50xH2mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB Φ 350x20x0.6mm	
Surface Mounted Screw set	CL-15 M3.5x50mm	
Clips	CP-29 39.5x20x12mm	

Interconnection Accessories

Connector	EX-25 39.5x20x12mm	
-----------	-----------------------	--

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	SIN	Silver White Black	Φ 1500mm up-down double lighting 45° Φ 1500mm up-down double lighting 90°
	PR	SIN	B	15A90

Ordering profile components


SIN5060-30A45 NEW

· Φ3m 45° arc(up-down double lighting), thousands of styles come from the connections of lines and arcs
 · 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
 Various installation ways: pendant, surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

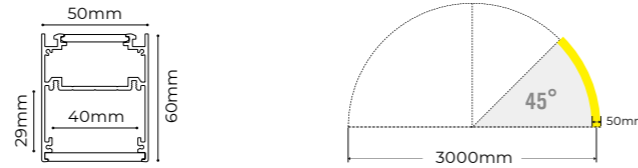

Profile components

Profile	PR-SIN5060-30A45 50X60,D3000mm,45°	
50 Diffuser	CV-AH5060-20000 L20000XW47XH4mm	
35 Diffuser	CV-AH5060-20000 L20000XW32XH3.5mm	
End cap	EC-AH5060 L60XW50XH2mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface Mounted Screw set	CL-15 M3.5x50mm	
Clips	CP-29 39.5X20X12mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--

Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	SIN	Silver	Φ3000mm up-down double lighting 45°
			White	
			Black	
	PR	SIN	B	30A45

Ordering profile components


SIN5060-2500 NEW

· 2500m straight line(up-down double lighting), thousands of styles come from the connections of lines and arcs
 · 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
 · Various installation ways: pendant, surface mounted



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward

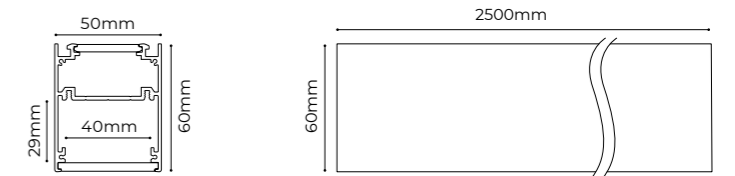

Profile components

Profile	PR-SIN5060 L2500XW50XH60mm	
50 Diffuser	CV-AH5060-20000 L20000XW47XH4mm	
35 Diffuser	CV-AH5060-20000 L20000XW32XH3.5mm	
End cap	EC-AH5060 L60XW50XH2mm	

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Surface Mounted Screw set	CL-15 M3.5x50mm	
Clips	CP-29 39.5X20X12mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--


Ordering Code

Category	Series	Section Size	Profile Color	Length
SINUS	PR	SIN	Silver	2500mm
			White	
			Black	
	PR	SIN	B	2500

Ordering profile components


Lighting Source

Rigid modular							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm-30A23	>80	1300LM/pcs	24V	11.6W/pcs	D3000x22.5x20x5.8mm	84LEDs	14LEDs

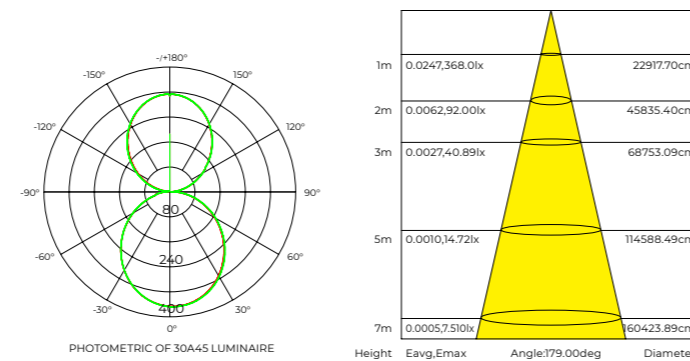

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DT8140-24V-20mm	>80	2490LM/M	24V	19.2W/m	5000x20x15.5mm	140LEDs	100mm/14LEDs
Rigid modular							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/pcs	Cutting unit
DY8140-24V-20mm	>80	1060LM/pcs	24V	9.6W/pcs	499x20x5.8mm	70LEDs	100mm/14LEDs

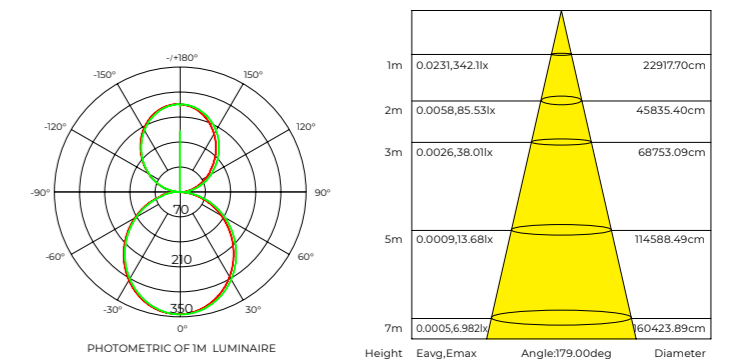



SIN5060-15N90 NEW

- Φ 1.5m 90° arc(inward-outward double lighting), the ends come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Installation way: pendant



Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward




Profile components

Profile	PR-SIN5060-15A45 50x60,D1500mm,90°	
50 Diffuser	CV-AH5060-20000 L20000xW47xH4mm	
35 Diffuser	CV-AH5060-20000 L20000xW32xH3.5mm	
End cap	EC-AH5060 L60xW50xH2mm	

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DB140-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

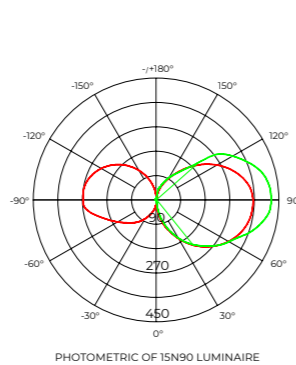

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB Φ 350x20x0.6mm	
Clips	CP-29 39.5X20X12mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--


Ordering Code

Category	Series	Section Size	Profile Color	Length				
SINUS	PR	-	Pendant/surface mounted	SIN	5060	Silver	S	Φ 1500mm inward-outward double lighting 90°
						White	W	
						Black	B	
	PR	-		SIN	5060		B	15N90

Ordering profile components



SIN5060-15W90 NEW

- Φ 1.5m 90° arc(inward-outward double lighting), the ends come from the connections of lines and arcs
- 20m flexible diffuser making it easy for installation without connections for over length application, no light leakage
- Installation way: pendant

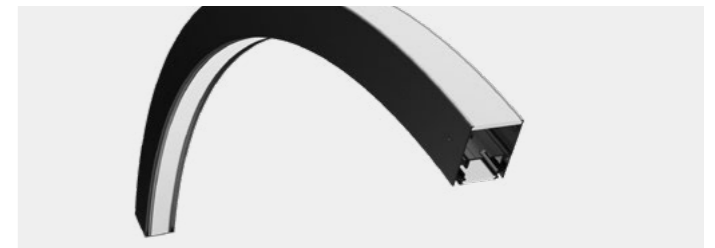

Basic Parameters

Profile material	AL6063-T5
Surface processing	Spraying RAL9003 <input type="radio"/> Spraying RAL9005 <input checked="" type="radio"/> Spraying <input type="radio"/>
Diffuser material	Silicone
Transmittance	>65%
Lighting direction	Upward and Downward




Profile components

Profile	PR-SIN5060-15A90 50x60,D1500mm,90°	
50 Diffuser	CV-AH5060-20000 L20000xW47xH4mm	
35 Diffuser	CV-AH5060-20000 L20000xW32xH3.5mm	
End cap	EC-AH5060 L60xW50xH2mm	

Lighting Source

Flexible strip							
Model	CRI	Lumens (4000K)	Voltage	Typ.power	Size	LEDs/m	Cutting unit
DB140-24V-20mm	>80	2120LM/M	24V	19.2W/m	4712x20x1.5mm	140LEDs	98mm/14LEDs

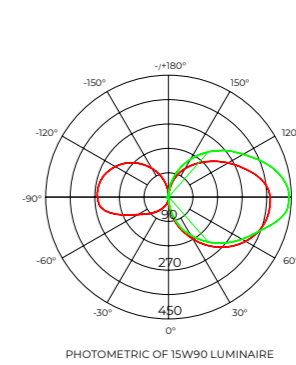

Installation Accessories

Pendant cable	PN-WXX 2m/4m	
Pendant cable (wire and line in one)	PN-CXX 2m/4m	
Canopy	PY-CBDB Φ 350x20x0.6mm	
Clips	CP-29 39.5X20X12mm	

Interconnection Accessories

Connector	EX-25 39.5X20X12mm	
-----------	-----------------------	--

Ordering Code

Category	Series	Section Size	Profile Color	Length				
SINUS	PR	-	Pendant/surface mounted	SIN	5060	Silver	S	Φ 1500mm inward-outward double lighting 90°
						White	W	
						Black	B	
	PR	-		SIN	5060		B	15W90

Ordering profile components

