


YES

LED Recessed downlight



YES 10569

LED 6.5W/8.5W (BRIDGELLUX LED)

LED Power	System Power	LED Output	System Output	Beam	CCT	CRI	Drive
6.5W	8W	814lm	514lm	15°	3000K	> 90	34V 200mA
6.5W	8W	814lm	528lm	24°	3000K	> 90	34V 200mA
6.5W	8W	814lm	545lm	36°	3000K	> 90	34V 200mA
6.5W	8W	814lm	524lm	45°	3000K	> 90	34V 200mA
8.5W	10W	976lm	561lm	15°	3000K	> 90	34V 250mA
8.5W	10W	976lm	623lm	24°	3000K	> 90	34V 250mA
8.5W	10W	976lm	668lm	36°	3000K	> 90	34V 250mA
8.5W	10W	976lm	644lm	45°	3000K	> 90	34V 250mA

Colour(Front ring)  Standard  Non-standard

WHITE   
BLACK

IP rate  Standard  Non-standard

IP20   
IP54

CCT  Standard  Non-standard

2700K   
3000K   
3500K   
4000K   
5000K   
2700-6000K

Control  Standard  Non-standard


ON/OFF   
DALI   
0/1-10V   
TRIAC   
BLUETOOTH   
ZIGBEE   
CASAMBI

Optical Accessories

When E01 is selected, the protection level is IP20;  
Choosing E02, E03, or E04 can achieve IP54 protection level;  
You can choose one or both: E01+E02, E01+E03, or E01+E04.



Light Distribution

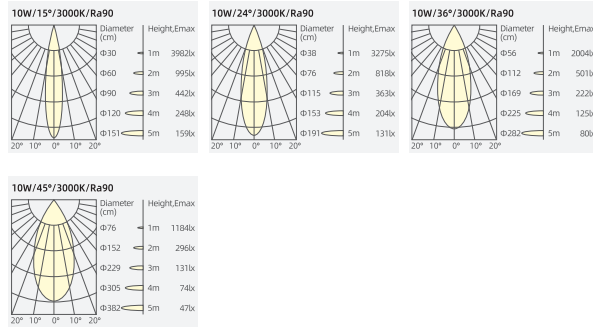

LED Recessed downlight

YES

