



**TOP BEND 0606**

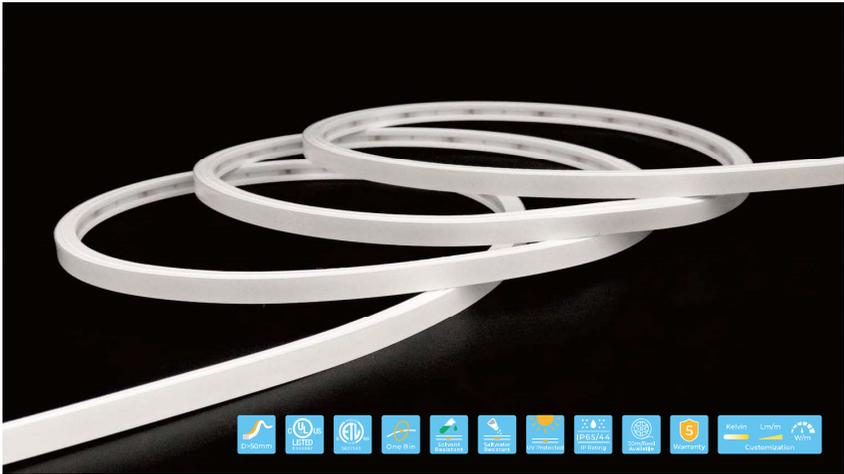


5mm slim luminous surface, sleek and refined, ideal for indoor outlines and furniture integration. Tri-color silicone extrusion with a clear window for easy cutting. High-density LED strip inside ensures uniform, glare-free light emission. 5 years warranty, lifespan ≥ 50,000 hours, 1 Bin.

**Dimensions**

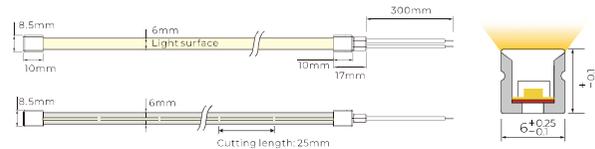

**Basic Parameters**

Model No.	NS-T0606
Voltage	DC24V
Power(w/m)	6W
Storage Temperature	-25°C~60°C
Ambient Temperature	Tamin=-25°C, Tamax (Table below)
Output	Low Output
Power(w/m)	6w
Max. Ambient temp.(Tamax)	55°C



Light Distribution Curve (24V, 6W, 4000K)



**Single Color**

Voltage	DC24 V
Circuit Design	CV
Power(w/m)	6w
Max. Run Length	5m
Cutting Length	25mm


**Parameters**

CRI	CCT	lm/m	w/m	lm/w
>90	1700K <sup>+200</sup> / <sub>-100</sub>	235.2	6	39.2
	2200K <sup>+200</sup> / <sub>-100</sub>	325.2	6	54.2
	2400K <sup>+200</sup> / <sub>-200</sub>	330	6	55
	2600K <sup>+200</sup> / <sub>-200</sub>	337.2	6	56.2
	2800K <sup>+200</sup> / <sub>-200</sub>	345	6	57.5
	3200K <sup>+300</sup> / <sub>-200</sub>	348	6	58
	3800K <sup>+400</sup> / <sub>-300</sub>	358.2	6	59.7
	4400K <sup>+400</sup> / <sub>-400</sub>	352.8	6	58.8
	5600K <sup>+400</sup> / <sub>-400</sub>	379.2	6	63.2

Note:  
 - CV: Constant Voltage CC: Constant Current.  
 - Max. Run length refers to single side feed in serial connection.  
 - The given color temperature is the temperature of finished products.  
 - The given data are typical values. Due to tolerances of the production process and the electrical components, testing parameters can vary up to 10%.  
 - The Constant Current version supports PWM dimming, but the PWM frequency must be kept below 2kHz.



**End Cap & Cable Lead Option**

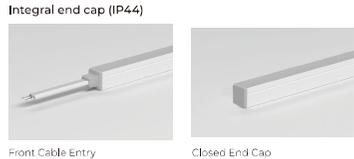

**Accessories**

