


TOP BEND 1010



10mm slim luminous surface with 3-sided light emission, ideal for indoor outlines.
Tri-color silicone extrusion with a clear window for easy cutting.
Dust-resistant matte finish ensures a clean look with uniform, natural light.
5 years warranty, lifespan ≥ 50,000 hours, 1 Bin.


Dimensions

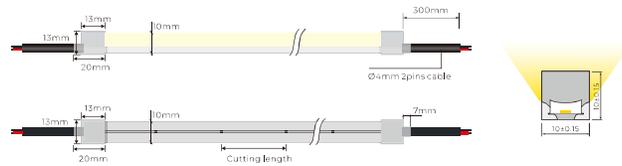

Basic Parameters

Model No.	NS-T1010	
Voltage	DC24V	
Power(w/m)	5w/10w	
Storage Temperature	-25°C~60°C	
Ambient Temperature	Tamin=-25°C, Tamax (Table below)	

Output	Low Output	Std Output
Power(w/m)	5w	10w
Max. Ambient tempt.(Tamax)	55°C	45°C



Light Distribution Curve
(24V, 10W, 4000K)



Single Color

Voltage	DC24 V
Circuit Design	CV
Power(w/m)	5W/10w
Max. Run Length	5m
Cutting Length	35.7mm

Parameters

CRI	CCT	lm/m	w/m	lm/w
>90	2100K±150	645	10	64.5
	2400K±150	685	10	68.5
	2700K±150	740	10	74
	3000K±150	790	10	79
	3500K±200	720	10	72
	4000k ⁺⁴⁰⁰ ₋₂₀₀	830	10	83
	5000k ⁺⁵⁰⁰ ₋₂₀₀	830	10	83
	6500k ⁺²⁰⁰ ₋₆₀₀	810	10	81
--	Red	330	10	33
	Green	920	10	92
	Blue	175	10	17.5
	Yellow	300	10	30
	Pink	350	10	35

Note:

- CV: Constant Voltage CC: Constant Current.
- Max. Run length refers to single side feed in serial connection.
- The given color temperature is the temperature of finished products.
- The given data are typical values. Due to tolerances of the production process and the electrical components, testing parameters can vary up to 10%.
- The Constant Current version supports PWM dimming, but the PWM frequency must be kept below 2KHz.



End Cap & Cable Lead Option

Silicone End Cap (IP67)



Front Cable Entry

Side Cable Entry

Bottom Cable Entry

Closed end cap

Integral end cap (IP44)



Front Cable Entry


Side Cable Entry

Bottom Cable Entry

Closed end cap



Accessories

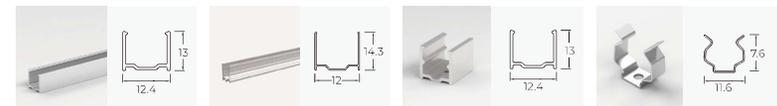

Aluminium Profile
Length: 1m/2m/3m

PC Profile
Length: 1m

Aluminium Mounting clips
Length: 2cm

Stainless Steel Mounting clips
Length: 0.8cm